



Arboricultural Method Statement

Orbis Ltd

**Emmbrook School
Emmbrook Road
Wokingham
Berkshire
RG41 1JP**

30 October 2025

Table of Contents

Introduction	4
Tree Survey.....	5
Arboricultural Impact Assessment.....	6
Trees to be Removed	6
Arboricultural Method Statement	7
Sequencing of works	7
Tree Work.....	8
Protected Species (general informative for tree works)	9
Protective Measures	10
Demolition.....	13
Construction.....	13
Prohibition.....	15
Site Management.....	16
Services.....	17
Landscaping.....	18
Monitoring and Supervision.....	19
Appendices	21
Appendix 1: Tree Schedule	22
Appendix 2: Arboricultural Impact Assessment.....	29
Appendix 3: Tree Protection Plan	31
Appendix 4: Tree Protection Notice	33
Appendix 5: Contact Details	35
Document Production Record	37

Table 1: Documents referred to.....	4
Table 2: Number of individual trees to be removed.....	6
Table 3: Number of groups to be removed	6
Table 4: Sequencing of works	7
Table 5: Summary of tree works	8
Figure 1: Example of protective barrier fencing with above-ground stabilising system (BS5837)	11

Introduction

Instruction

Arbtech Consulting Limited (Arbtech) received written instruction on 16 September 2022 from Orbis Ltd to attend Emmbrook School, Emmbrook Road, Wokingham, Berkshire, RG41 1JP (the site) to undertake an arboricultural survey guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction – Recommendations of all trees, hedges and major shrub groups growing on and/or within influencing distance of the site and to produce a Schedule of Trees and Tree Constraints Plan (TCP).

A further written instruction was received on 24 September 2025 from Orbis Ltd to produce an Arboricultural Impact Assessment (AIA), Tree Protection Plan (TPP) and Arboricultural Method Statement (AMS).

Executive Summary

A tree survey guided by British Standard 5837:2012 'Trees in relation to design, demolition and construction – Recommendations' ("BS5837") was carried out to include all trees within influencing distance of the proposed area for development.

This report has subsequently been produced, balancing the layout of the proposed development against the competing needs of retained trees. This report comprises all of the requisite elements of an arboricultural implications assessment, method statement, and any required supporting plans.

It is the conclusion of this report that if followed, the overall quality and longevity of the amenity contribution provided for by retained trees within and adjacent to the site will not be adversely affected as a result of the local planning authority consenting to the proposed development.

Table 1: Documents referred to

Document	Originator	Reference Number	Title
Survey base drawing	HLM Architects	EMM-HLM-ZZ-00-DR-A-SK010	Sketch Existing Topo Overlay
Proposed layout drawing	HLM Architects	EMM-HLM-ZZ-00-DR-A-00101_P04	Ground Floor GA Proposed
Tree Schedule (TS)	Arbtech Consulting Ltd	Arbtech TS 01	Tree Schedule
Arboricultural Impact Assessment (AIA)	Arbtech Consulting Ltd	Arbtech AIA 01	Arboricultural Impact Assessment
Tree Protection Plan (TPP)	Arbtech Consulting Ltd	Arbtech TPP 01	Tree Protection Plan
Arboricultural Method Statement (AMS)	Arbtech Consulting Ltd	Arbtech AMS 01	Arboricultural Method Statment

Tree Survey

An arboricultural survey guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction - Recommendations of all trees within impacting distance of the site was undertaken by Charlie Moore on 04 October 2022.

A total of 15no. individual trees, 8no. groups of trees and 2no hedges were surveyed.

For full details of all the trees surveyed, see Appendix 1: Tree Schedule.

Survey Limitations

The survey was made at ground level using visual observation only. Detailed examinations, such as climbing inspections and advanced decay detection equipment, were not employed, though they may form part of the survey's management recommendations. Measurements were taken using specialist tapes, lasers, and GPS devices. Where this was not possible, measurements are estimated. Inaccessible trees will have the best estimates made about their location, physical dimensions, and characteristics. Trees have been grouped where BS5837 guides us that it is expedient to do so. Trees have been excluded from the survey if they are found by us to be sufficiently far away from the proposed developable area or if they are outside of the red line boundary plan showing the expectations of our client for the extent of the survey.

Scope

Pre-development tree surveys make arboricultural management recommendations based exclusively upon the condition of the individual tree or group of trees relative to their present context (*i.e., not in relation to the proposed development*).

Legal Status

No statutory protection check has been performed. BS5837 does not draw any distinction between trees subject to statutory protection, such as a Tree Preservation Order ("TPO"), and those trees without, starting at Annex B:

The potential effect of development on trees, whether statutorily protected (e.g. by a tree preservation order or by their inclusion within a conservation area) or not, is a material consideration that is taken into account in dealing with planning applications. Consequently, we do not seek to offer any comparison between or infer any difference in the quality or importance of TPO trees and other trees.

Arboricultural Impact Assessment

An Arboricultural Impact Assessment (AIA) guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction - Recommendations was undertaken by Phil Gower on 30 October 2025 to determine the potential conflicts between the proposed development scheme and existing trees located on and near the site and has subsequently produced this Arboricultural Method Statement to demonstrate how the proposed scheme can be successfully implemented without causing harm to retained trees.

Several issues may need to be addressed in an Arboricultural Impact Assessment between the trees and the proposed development; these are as follows:

- The effect and extent of the proposed development within the root protection areas (RPAs) of retained trees;
- The potential conflicts of the proposed development with canopies of retained trees and;
- The likelihood of any future remedial works to retained trees beyond those that would have been scheduled as part of usual management.

These impacts can be seen on the Arboricultural Impact Assessment (Arbtech AIA 01). See Appendix 2: Arboricultural Impact Assessment.

Trees to be Removed

A total of 1no. group of trees will require removal as part of this proposed scheme.

A breakdown of all tree works can be seen in Table 5: Summary of tree works.

Table 2: Number of individual trees to be removed

U	A	B	C
0	0	0	0

Table 3: Number of groups to be removed

U	A	B	C
0 (0)	0 (0)	1 (0)	0 (0)

() = partial removal of a group

Arboricultural Method Statement

This Arboricultural Method Statement, Arbtech AMS 01, demonstrates how any aspect of the development that could potentially result in tree loss or damage may be implemented and provides an adequate level of protection for trees that are to be retained during the proposed works.

Details of key site personnel, including the Site/Project Manager, will be submitted to the Council's Tree Officer before site works commence. This Arboricultural Method Statement, Arbtech AMS 01, is to be approved and agreed to in writing by all key personnel before the commencement of any site works.

No site personnel are to be present, and no demolition, site clearance, building work, or material delivery is to occur until the protective measures are in accordance with this Arboricultural Method Statement, Arbtech AMS 01, and the Tree Protection Plan, Arbtech TPP 01. Unless otherwise specified, protective measures will remain unaltered and in situ for the entire duration of the construction.

Sequencing of works

A logical sequence of events is to be observed and shall be phased as follows:

Table 4: Sequencing of works

Stage	Event
Stage 1.	Undertake and complete tree works as specified within Table 5: Summary of tree works
Stage 2.	Installation of protective measures in accordance with the approved Tree Protection Plan(s) (Arbtech TPP 01).
Stage 3.	Pre-commencement site meeting.
Stage 4.	Undertake and complete demolition of existing site features.
Stage 5.	Undertake and complete ground works.
Stage 6.	Undertake and complete construction works
Stage 7.	Undertake and complete hard landscaping works.
Stage 8.	Removal of all machinery and materials from the site.
Stage 9.	Dismantle and removal of protective tree measures.
Stage 10.	Undertake and complete soft landscaping works.
Stage 11.	Site completion and sign-off from Project Arboriculturist.

Tree Work

For reasons of public safety, all tree works referred to herein must be carried out before site personnel commence work or building materials are delivered.

Table 5: Summary of tree works

Tree Number	Species	Works	Category
H01	Various	Cut back to boundary as shown on plan	C.2
G04	Various	Remove all trees/vegetation within site boundary; grind stumps	B.2

Notes

All tree work is to be undertaken in accordance with British Standard BS 3998:2010 - Recommendations for tree work. All arising's are to be removed, and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber Lorries, tractors, excavators, or cranes shall be parked or driven beneath the crowns of any retained trees to prevent subsequent compaction and root death.

Protected Species (general informative for tree works)

Conservation Status of British Bats

The consensus in Britain and Europe is that virtually all bat species are declining and vulnerable. Our understanding of population status is poor as there is very little historical data for most bat species. Certain species, such as the horseshoe bats, are better understood and have well-documented contractions in range and population size. Given this general picture of decline in the UK Government, the UK Biodiversity Action Plan has designated five species of bats as priority species (greater and lesser horseshoe bats, barbastelle, Bechstein's, and pipistrelle). These plans provide an action pathway for investigating the maintenance and restoration of the former populations' levels.

Legal Status of British Bats

Given the above position, all British bats, as well as their breeding sites and resting places, enjoy national and international protection. All bat species in the UK are fully protected under the Wildlife and Countryside Act 1981 (as amended) through inclusion in Schedule 5. All bats are also listed in Annex IV (and some in Annex II) of the EC Habitats Directive, giving further European protection. Taken together, the Act and Conservation of Habitats and Species Regulations 2012 (as amended)* make it an offence to intentionally or deliberately kill, injure or capture (take) bats;

- Deliberately disturb bats (whether in a roost or not);
- Damage, destroy or obstruct access to bat roosts;
- Possess or transport a bat or any part of a bat unless acquired legally;
- Sell, barter or exchange bats or parts of bats

Although the legislation does not strictly protect foraging grounds, it does protect roost sites. Bat roosts are protected at all times of the year, whether or not bats are present. Any disturbance of a roost due to development must be licenced.

**the regulations that delivered by the UK's commitments to the Habitats Directive.*

Breeding Birds

All nesting birds are protected under the Wildlife and Countryside Act (as amended) 1981, which makes it an offence to intentionally kill, injure or take any wild bird or take, damage or destroy its nest whilst in use or being built, or take or destroy its eggs. Furthermore, several birds enjoy further protection under that Act and are listed on Schedule 1 of the Act. These further protected birds are also protected from disturbance and it may be necessary to operate "no-go" buffer zones around such nests – typically out to 100m. Planning policy guidance on the treatment of species identified as priorities under the biodiversity action programme suggests that local authorities should take measures to protect the habitats of these species from further decline through policies in local development documents and should ensure that they are protected from the adverse effects of development, where appropriate, by using planning conditions or obligations. The conservation of these species should be promoted through the incorporation of beneficial biodiversity designs within developments.

Protective Measures

Protective measures are to be installed immediately following the completion of the tree works and sited and aligned in accordance with the Tree Protection Plan, Arbtech TPP 01, before the commencement of any works or the introduction of any machinery or material to the site.

Upon installing the protective measures around the retained trees, the client will instruct on a pre-commencement site meeting, during which the Project Arboriculturist will visit the site to inspect and document the position and specifications of the protective measures.

If the protective measures and their positions do not comply with this Arboricultural Method Statement, Arbtech AMS 01, dated: 30 October 2025 and Tree Protection Plan, Arbtech TPP 01, the Project Arboriculturist shall inform the client and Fencing Contractor so adjustments can be made.

When the protective measures comply with this Arboricultural Method Statement, Arbtech AMS 01, and Tree Protection Plan, Arbtech TPP 01, the Project Arboriculturist will sign-off the protective measures in writing to the client for which a copy can be sent to the Fencing Contractor, Site Agent and Local Authority Tree Officer.

If the protective measures become damaged or there is an accident or emergency involving trees, these areas are to be cordoned off immediately with high-visibility plastic mesh fencing. The site agent is to photograph and document the damage and inform the Project Arboriculturist immediately after the incident. All work within this area is to cease until the Project Arboriculturist has visited the site. Any damaged sections of protective measures shall be replaced within 48 hours of the initial incident.

The protected area is sacrosanct and will not be invaded by the storage of materials, the mixing of concrete or other products, the access of machinery, equipment, or pedestrians, or any other way disturbed by construction activity.

The protective measures will remain in place until the completion of Stage 8 (see Table 4: Sequencing of works) thereafter, they will be carefully dismantled only with the agreement of the Project Arboriculturist and or the Local Authority Tree Officer.

The existing site boundary measures are to be retained for the duration of the development. If, for any reason, the existing boundary measures are not to be used, protective barrier fencing is to be installed along the line of the boundaries and is only to be removed upon the written permission of the Project Arboriculturist upon the completion of the development or immediately before the installation of the permanent boundary measures.

No equipment, vehicles, or plant shall operate beyond the tree protection fencing. Booms, hoists, and rigs should be kept as far away from the canopies of retained trees as possible at all times. Where it is necessary to operate within 5m of a tree canopy, it will be done with the utmost caution and under the control of a banksman. Damage to trees will be considered a breach of this Tree Protection Plan and Arboricultural Method Statement, which in turn could be a breach of planning permission.

Construction Exclusion Zone

A construction exclusion zone (CEZ), as designated by the protective barrier fencing, is an area where there is to be no construction activity. Access to the area for construction personnel or machinery is strictly prohibited unless detailed in the tree protection plan, and there is no scope for materials or waste storage, welfare facilities, etc. There may be some construction activities planned for these areas (e.g. the installation of service trenches) these activities will be undertaken under the direct supervision of the Project Arboriculturist.

Protective Barrier Fencing

Protective barrier fencing should be appropriate for the intensity and proximity of the development to protect trees where development activity is nearby.

The protective barrier fencing will be fixed with signage denoting the words “tree protection area” at 5.0m intervals. See Appendix 4: Tree Protection Notice

Secondary specification: The fence will comprise 2m tall welded mesh panels on rubber or concrete feet. The panels are to be joined together using a minimum of two anti-tamper couplers installed so that they can only be removed from inside the fence. The panels will be supported on the inner side by stabiliser struts, which will be attached to a base plate and secured with ground pins.

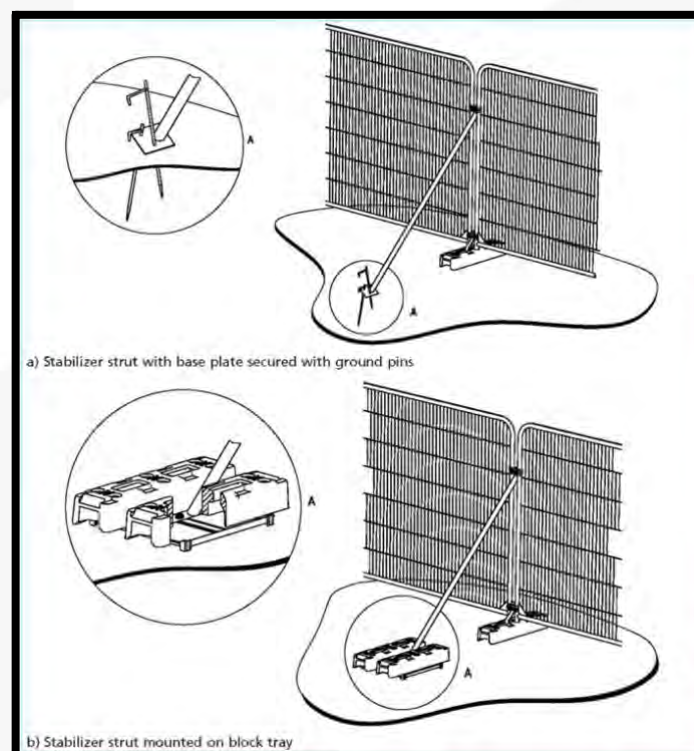


Figure 1: Example of protective barrier fencing with above-ground stabilising system (BS5837)

Ground Protection

The existing hard surfacing within the RPAs of retained provides passive protection against compaction to the underlying soil and, therefore, must be retained for the duration of the project. If this is removed, it shall be done so under the direct supervision of the Project Arboriculturist and replaced immediately with either the new surface treatment or with suitable ground protection capable of withstanding the likely loading for the site.

New temporary ground protection will be capable of supporting any traffic entering or using the site without being distorted or causing compaction of the underlying soil.

Where the Project Engineer determines that any hard surfacing is not adequate protection from any expected loading, ground boarding is to be installed to the engineer's specification on top of the hard surfacing within the root protection areas of retained trees.

Where machinery will be stored or used on the ground boarding within the RPAs of retained trees, an impervious barrier and/or bunding to prevent oils, fuel, or chemicals from leaching into the soil within or adjacent to the RPAs is to be installed.

Note: The ground protection might comprise one of the following:

- a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame to form a suspended walkway or on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;
- b) for pedestrian-operated plant up to a gross weight of 2t, proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150mm depth of woodchip), laid onto a geotextile membrane;
- c) for wheeled or tracked construction traffic exceeding 2t gross weight, an alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice to accommodate the likely loading to which it will be subjected.

For any situations other than those described in a) or b) (as above), the ground boarding is to be designed by a suitably qualified person to an engineering specification in conjunction with arboricultural advice to be suitable for supporting the expected loading to be placed upon it.

In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath so that tree root functions remain unimpaired.

Due to the various sizes of demolition and construction plant available and the potential requirements for material storage within the site, the final specifications for the ground boarding must be designed and supplied to the Project Arboriculturist for their approval by the Project Engineer a minimum of ten (10) working days before its installation.

Demolition

Before the demolition of the existing site features, all tree works are to have been completed, tree protection measures are to be in place as per Tree Protection Plan document, Arbtech TPP 01, and have been signed-off, and a copy of the demolition method statement submitted and approved by the Project Arboriculturist to ensure that there is no conflict with this Arboricultural Method statement.

Demolition of the existing features is to be undertaken carefully and so that all debris and materials fall outside the RPAs and away from the canopies of all retained trees.

Hard Surfacing

Where hard surfacing must be removed and/or resurfaced within the RPAs of retained trees, it is to be undertaken under the direct supervision of the Project Arboriculturist during the landscaping phase of the development.

The wearing course will be broken up using a handheld pneumatic breaker, hand tools, and wheelbarrows to remove the surfacing. Where the subbase must be removed, a fork will be used to loosen the material, and shovels and wheelbarrows will be used to move it.

In some situations, and at the discretion of the Project Arboriculturist, an excavator using a hydraulic breaker and a suitably sized toothless grading bucket may be possible. If an excavator is to be used, it must be situated outside of the RPAs, on top of the hard surfacing, working away from the RPAs or from suitable ground boarding capable of withstanding the expected loading.

Whichever system is used, there is to be **NO** disturbance of the underlying soil. If roots are found, they are to be covered over with damp hessian, and a layer of either sharp sand, wood chip, or topsoil will be applied as soon as practicably possible to prevent desiccation.

Existing Underground Services

Existing services within the site should be retained wherever possible. Where existing services within RPAs of retained trees require upgrading, the utmost care must be taken to minimise disturbance. Trenchless techniques should be employed where feasible, and open excavations should be considered only where necessary.

Construction

Based on the information provided, the proposed development does not impact any of the retained trees and, as such, will not require any specialist construction methodology.

Before the proposed development is constructed, however, a copy of the construction method statement will be submitted and approved by the Project Arboriculturist to ensure that it does not conflict with this Arboricultural Method Statement.

Boundary fences

Replacement boundary fence posts are to be located so that they will not damage or require the removal of significant roots 25mm or greater in diameter; this should, where possible, mean re-utilisation of existing post holes. Where this is not possible, individual post holes may have to be relocated; this may require individual posts to be relocated.

Note: *this will increase or decrease the spacing between the posts (bay lengths).*

All posts within the RPAs of retained trees are to be excavated manually using handheld tools (spade, shovel, rabbiting spade, post hole digger); no mechanised equipment (handheld or plant-mounted post borer) is to be used.

Concrete foundations

Before concrete is poured to form the foundations within or immediately adjacent to the RPAs of retained trees, the excavation is to be lined and sealed to prevent any leaching of the concrete into the soil and causing desiccation of retained roots by concrete runoff.

Manual excavation

Excavation within RPAs will be undertaken by hand under the direct supervision of the Project Arboriculturist to the required depth of the foundations or to a minimum of 600mm deep of any excavation, whether for proposed foundations, hard surfacing, or underground services. The Project Arboriculturist will determine the total depth of the manual excavation while on site.

The soil is to be loosened with a fork or pickaxe and then cleared with an air spade, air vac, or shovel. The Project Arboriculturist will cleanly sever any roots found with either a hand saw or secateurs.

The Project Arboriculturist shall cleanly sever any roots found with a diameter of less than 25mm. Roots of 25mm and above shall be excavated around without damaging them; the Project Arboriculturist shall decide if it is feasible or necessary to retain the root; if not, it shall be severed.

The edge of the excavation closest to the trees will be covered with damp hessian to prevent soil collapse or contamination by concrete.

Prohibition

- Mechanical digging or scraping is not permitted within a defined root protection area or areas cordoned off by protective barrier fencing.
- No access will be permitted within the protected areas;
- No materials, equipment or debris will be stored within any of the fenced areas or against the fencing;
- Fires are not permitted within 10m of any vegetation.
- Leaning objects against or attaching objects to a tree is not permitted.
- Machinery, plant, and vehicles are not permitted to be washed down within 10m of vegetation.
- Chemicals and materials are not to be transported, stored, used, or mixed within a root protection area or areas cordoned off by protective barrier fencing.
- Cement silos and mixing sites are to be situated within a bunded area to prevent spillage/leaking of chemicals harmful to trees. These areas are to be sited well clear of protected trees.
- Refuelling of plant or machinery is prohibited within 10m of the construction exclusion zones.
- An allowance must be made for sloping ground so that damaging materials such as concrete washings, mortar, or diesel oil cannot run towards trees.
- Where machinery is to be used within 5m of retained tree canopies, a banks man will be required at all times while setting up, moving, or operating within this distance of retained tree canopies.
- All caustic material and chemicals must be stored well clear of protected areas and preferably on lower ground if slopes are present or within a bonded area to prevent spills or leaks from entering the ground.

Site Management

The Site Manager will be responsible for briefing and inducting all personnel who will be working on any stage of this development, especially those who will be working within or adjacent to the canopies or RPAs of retained trees, and will make them aware of and provide a copy of this Arboricultural Method Statement, Arbtech AMS 01, and Tree Protection Plan, Arbtech TPP 01; this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing and or pouring of cement and concrete.

The Site Manager will be responsible for the day-to-day running and protection of all retained trees and for liaising with the Project Arboriculturist about any tree-related matters and before any works that may or will affect the RPAs or canopies of retained trees; this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing, pouring and storage of all caustic materials that may cause harm to retained trees.

The Site Manager will document any incidents of damage to retained trees or tree protection measures. Then, the Site Manager will report these incidents to the Project Arboriculturist immediately and ensure that works within this area cease until the Project Arboriculturist has had an opportunity to inspect the damage and, where appropriate, agree on a mitigation plan with the Local Planning Authority Tree Officer.

The Site Manager may designate another person to take charge of the briefing and inducting process of new site personnel or visitors in his absence.

If the Site Manager is replaced or is absent from the site for more than three consecutive working days, the Project Arboriculturist will be informed, and a new pre-start meeting will be held with the new or acting Site Manager.

It is the responsibility of the Site Manager to ensure that the planning conditions attached to any granted planning consent are adhered to at all times and that a monitoring regime and supervision of any works within or adjacent to the RPAs are adopted.

If pruning works other than those previously approved are required at any time, permission must be sought from the Local Authority Tree Officer. Once permission is granted, they are to be carried out by a suitably qualified person in accordance with BS3998:2010 Tree work—Recommendations.

Services

Detailed drawings of proposed underground services are not available at this time; hence it is not possible to identify any specific potential impacts associated with the scheme at this stage.

Existing services within the site will be retained wherever possible. Where existing services within RPAs require upgrading, the utmost care must be taken to minimise disturbance. Where feasible, trenchless techniques are to be employed, and only where necessary should open excavations be considered.

Where new services are to be introduced into the site, they will be located outside of RPAs so that they do not interfere with tree roots. If any excavations are required within the RPAs, all trenches are to be excavated by hand radially to the tree trunks under the direct supervision of the Project Arboriculturist and carried out under NJUG guidelines.

The final positions of any proposed services will be verified and approved by the Project Arboriculturist and Local Authority Tree Officer before implementation.

New Underground services

Trenching for the installation of underground services and drainage routes could sever any roots that may be present and, as such, adversely affect the tree's health. For this reason, particular care will be taken in routing and installation methods of all underground services. All underground services and drainage routes will be located so that no excavations are required within RPAs.

Where underground services have been impossible to prevent from passing through RPAs or within proximity to trees, these sections are to be installed in one of three ways and under the direct supervision of the Project Arboriculturist and in accordance with the National Joint Utilities Group guidelines (NJUG 4).

Trenchless Techniques

There are three main types of trenchless techniques: guided and unguided boring and pipe replacement by lining or bursting. These techniques allow for the installation, maintenance, or renewal of underground services without disturbing soil in which roots are likely to grow. Starting and receiving pits for the boring machinery are to be located outside of the RPAs of any retained trees, with the bore depth maintained at a minimum depth of 600mm below the existing ground level. Techniques involving external lubrication of the equipment shall use only water, as other lubricants (e.g., oil, bentonite, etc.) could contaminate the soil.

Broken Trench – Hand Dug

This technique combines both trenchless techniques and manual excavation, where excavation is unavoidable. Excavations will be limited to where there is clear access around and below the roots. All trenches shall be excavated by hand with the same precautions taken as for manual excavation. The open section of the trench will only be large enough to allow access for linking to the next section.

Manual Excavation

Excavation within RPAs will be undertaken by hand under the direct supervision of the Project Arboriculturist to the required depth of the foundations or to a minimum of 600mm deep of any excavation, whether for proposed foundations, hard surfacing, or underground services. The Project Arboriculturist will determine the total depth of the manual excavation while on site.

The soil is to be loosened with a fork or pickaxe and then cleared with an air spade, air vac, or shovel. The Project Arboriculturist will cleanly sever any roots found with either a hand saw or secateurs.

The Project Arboriculturist shall cleanly sever any roots found with a diameter of less than 25mm. Roots of 25mm and above shall be excavated around without damaging them; the Project Arboriculturist shall decide if it is feasible or necessary to retain the root; if not, it shall be severed.

The edge of the excavation closest to the trees will be covered with damp hessian to prevent soil collapse or contamination by concrete.

The soil beneath the depth may be sheet piled, regular piled, or excavated deeper. Machinery may be used for this, provided that it is situated outside of the RPAs of retained trees or has appropriate ground protection in place to move around and work upon.

Landscaping

Landscaping, such as planting, turfing, fencing, etc., around retained trees may only be carried out once all tree protection measures have been removed.

All excavations within the RPAs of retained trees shall be undertaken by hand and without reducing current ground levels unless it is agreed in writing with the Local Planning Authority. At no time is the use of a rotavator permitted within the RPAs of retained trees.

Any tree roots discovered will be left in situ and shall not be cut or otherwise damaged. Where possible, the soil structure within the RPA shall be preserved.

No works will be carried out within the RPAs of any trees if the soil moisture is at a level where soil compaction may be likely. Should the soil become compacted or have a poor structure that would hinder the development of the existing trees and plants or any new plantings, the arboriculturist will be consulted about soil decompaction techniques.

Monitoring and Supervision

Where trees have been identified within this Arboricultural Method Statement, Arbtech AMS 01, and Tree Protection Plan, Arbtech TPP 01, for retention, there will be an auditable system of arboricultural monitoring. This is to extend to arboricultural supervision whenever demolition or construction activity is to take place within or adjacent to any canopy or RPA.

The development's tree protection measures are to be monitored, and all demolition and construction works are to be undertaken within or adjacent to the RPAs of retained trees. The Project Arboriculturist will supervise the work and record and report observations to the Council at appropriate intervals.

Pre-commencement site meeting

Before the commencement of any works or machinery and materials arriving on site, a pre-commencement site meeting involving the Project Arboriculturist, Landowner or Agent, Site Manager, contractors and Engineer (as appropriate) and the relevant Local Planning Authority Officers will be held to ensure that all aspects of the Arboricultural Method Statement and Tree Protection Plan are understood and for all parties to swap contact details. See Appendix 5: Contact Details.

Monitoring and supervision schedule

The initial monitoring visit will check that the tree protection measures are in the correct location and as specified within the approved Arboricultural Method Statement, and if so, to sign off on their installation.

Thereafter, monitoring visits are to take place at regular intervals to ensure that tree protection measures are in place and are functioning as designed or whenever necessary to undertake works to be carried out under arboricultural supervision. The frequency of the monitoring visits is to be agreed upon with the Local Authority Tree Officer at the pre-commencement site meeting.

A record of all arboricultural monitoring and supervision visits will be kept, and any faults will be logged; this will then be copied to the Site Agent, Developer, and Local Planning Authority in a digital format.

If areas must be redesigned during the development so that they would require changes to the approved Arboricultural Method Statement or Tree Protection Plan and so affect retained trees, the Project Arboriculturist and Local Authority Tree Officer will be invited to attend a site meeting with all relevant parties. Before any changes are implemented, they must have been approved in writing by the Local Authority Tree Officer.

Supervision

The Project Arboriculturist will be required to attend the site to directly supervise all demolition and construction works that are to be undertaken within or adjacent to the RPAs of all retained trees and will be advised a minimum of 72 hours before the commencement of any works that require his attendance; these will include:

1. Pre-commencement site meeting;
2. Location of protective measures;
3. Any excavations within and immediately adjacent to RPAs, including foundations, hard surfacing, or underground services (a non-exhaustive list);
4. Removal of protective measures and sign-off.

Completion meeting

Once all construction works have been completed and all materials and machinery have been removed from the site, the Project Arboriculturist shall be informed and will invite the Local Authority Tree Officer to meet on-site to discuss the process, final remedial works that may be required and sign the development off so that the protective measures may be removed.

Appendices

The following documents were released to the Client as appendices to this report:

- Appendix 1: Tree Schedule
- Appendix 2: Arboricultural Impact Assessment
- Appendix 3: Tree Protection Plan
- Appendix 4: Tree Protection Notice
- Appendix 5: Contact Details

If you require clarification of the information contained herein, please do not hesitate to contact us via 01244 661170.

Yours sincerely,



Phil Gower MArborA

Technical Manager (Arboriculture)

07842 416721

philgower@arbtech.co.uk

A large, light gray, stylized graphic of a house roof with a chimney, spanning the width of the page and partially behind the text.

Appendix 1: Tree Schedule

BS5837:2012 Tree Survey

Arbtech Consulting Ltd

Client: Orbis Ltd
 Project: Site 1: Emmbrook School, Emmbrook Rd,
 Wokingham, Berkshire, RG41 1JP
 Survey Date: 04/10/2022
 Surveyor: Charlie Moore



Unit 3, Well House Barns
 Chester Road
 Chester
 Cheshire
 CH4 0DH
 Phone: 01244661170

Tree and Tag No Species		Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC	
			No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment				
G01											Estimated Measurements				
Various		18	1	220	N	2	0	M	A: 21.9	Good	C: Good				B.2
See comments for details					E	2	0		R: 2.64		S: Not visible	Offsite group of large established trees, with a dense shrub and her layer; species include hazel, ash, bramble and liquidambar; recorded dimensions denote the maximum measurements for the group - stem diameters between 220mm and 50mm, heights between 18m and 2m.			20+ yrs
					S	2	0				B: Not visible				
					W	2	0								
G02												Estimated Measurements			
Various		17	1	340	N	5	0	M	A: 52.3	Good	C: Good				B.2
See comments for details					E	5	0		R: 4.08		S: Not visible	Offsite group comprised of several large trees; species include willow, elder and ash; recorded dimensions denote the maximum measurements for the group - stems between 340mm and 150mm.			40+ yrs
					S	5	0				B: Not visible				
					W	5	0								
G03												Estimated Measurements			
Various		3.5	1	60	N	1	0	M	A: 1.6	Good	C: Good				C.2
See comments for details					E	1	0		R: 0.71		S: Not visible	Shrub group comprised of bay and buddleia; recorded dimensions denote the average for this group.			40+ yrs
					S	1	0				B: Not visible				
					W	1	0								
G04												Estimated Measurements			
Various		8	1	300	N	3	0	M	A: 40.7	Good	C: Good				B.2
See comments for details					E	3	0		R: 3.59		S: Not visible	Onsite group; species include sycamore and ash; recorded dimensions denote the maximum measurements for the group - stems between 300mm and 240mm.			20+ yrs
					S	3	0				B: Not visible				
					W	3	0								
Age Classifications:		N Y SM	Newly planted Young Semi-mature	EM M OM	Early Mature Mature Over Mature	Condition:		C S B	Crown Stem Basal area	Stems:		Ø (Eq)	Diameter Equivalent stem diameter using BS5837:2012 definition		
										ERC:		Estimated Remaining Contributio			


Tree and Tag No Species		Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC
			No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment			
G05												Estimated Measurements		
Various		11	1	190	N	2.5	0	M	A: 16.3	Good	C: Good			C.2
See comments for details					E	2.5	0		R: 2.27		S: Not visible	Onsite group comprised of several single and multi stemmed trees; species include sycamore, hazel, alder, field maple and whitebeam; recorded dimensions denote the maximum measurements for the group - stems between 190mm and 40mm.		20+ yrs
					S	2.5	0				B: Not visible			
					W	2.5	0							
G06												Estimated Measurements		
Various		7	1	170	N	2	0	M	A: 13.1	Good	C: Good			C.2
See comments for details					E	2	0		R: 2.04		S: Not visible	Onsite group comprised of several single and multi stemmed trees, located on a raised bed approximately 1m from ground level; species include yew, holly, hawthorn and sycamore; recorded dimensions denote the maximum measurements for the group - stems between 170mm and 40mm.		20+ yrs
					S	2	0				B: Not visible			
					W	2	0							
G07												Estimated Measurements		
Various		16	1	280	N	5.5	0	M	A: 35.5	Good	C: Good			B.2
See comments for details					E	5.5	0		R: 3.36		S: Not visible	Onsite group comprising of several individual and multi stemmed trees, with a dense shrub layer; species include holly, ash, birch and yew; recorded dimensions denote the maximum measurements for the group - stems between 280mm and 130mm.		40+ yrs
					S	5.5	0				B: Not visible			
					W	5.5	0							
G08												Estimated Measurements		
Various		4.5	1	150	N	2	0	EM	A: 10.2	Good	C: Good			C.2
See comments for details					E	2	0		R: 1.8		S: Not visible	Onsite group comprising of several multi and single stemmed trees; species include holly, whitebeam and Hawthorn; recorded dimensions denote the maximum measurements for the group - stems between 150mm and 70mm.		40+ yrs
					S	2	0				B: Not visible			
					W	2	0							
H01												Estimated Measurements		
Various		9	1	180	N	2.5	0	M	A: 14.7	Good	C: Good			C.2
See comments for details					E	2.5	0		R: 2.16		S: Not visible	Onsite boundary hedge; species include oak, Lawson cypress and laurel; recorded dimensions denote the maximum measurements for the hedge - stems between 180mm and 50mm.		40+ yrs
					S	2.5	0				B: Not visible			
					W	2.5	0							
Age Classifications:		N	Newly planted	EM	Early Mature		Condition:		C	Crown	Stems:		Ø	Diameter
		Y	Young	M	Mature				S	Stem			(Eq)	Equivalent stem diameter using BS5837:2012 definition
		SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio	

Tree and Tag No Species		Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC	
			No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment				
H02												Estimated Measurements			
Various <i>See comments for details</i>		4	1	100	N	2	0	M	A: 4.5 R: 1.19	Good	C: Good S: Not visible B: Not visible	Onsite boundary hedge; species include hazel, sycamore and hawthorn; recorded dimensions denote the maximum measurements for the hedge - stems between 100mm and 50mm, heights between 4m and 2m.			C.2 40+ yrs
T01															
Common Ash <i>Fraxinus excelsior</i>		17	1	750	N	8.5	6	M	A: 254.5 R: 9	Good	C: Good S: Fair B: Good	Located in grassland; exposed roots around the base with superficial bark damage consistent with machinery; historic pruning around the main stem and throughout the crown - wounds approximately between 60mm and 220mm, between full and 30 percent occlusion; large fungal fruiting body consistent with Inonotus hispidus from 3m on the southern side of main stem, above a historic pruning wound; widespread crown.			C.1 10+ yrs
T02															
Wild Cherry <i>Prunus avium</i>		10	1	420	N	4.5	2	M	A: 79.8 R: 5.03	Good	C: Good S: Good B: Good	Located in grassland; asymmetrical crown distribution due to neighbouring trees; historic pruning around the crown break - wounds approximately between 20mm and 120mm, circa 20 percent occlusion.			C.1 10+ yrs
T03															
Norway Maple <i>Acer platanoides</i>		10	1	340	N	2	2.5	M	A: 52.3 R: 4.08	Good	C: Good S: Good B: Good	Located in grassland; historic pruning around the lower canopy to clear adjacent road - wounds approximately between 30mm and 60mm - circa 20 percent occlusion; asymmetrical crown distribution due to neighbouring trees.			B.1 40+ yrs
T04															
Pear <i>Pyrus sp.</i>		10	1	290	N	2.5	2.5	M	A: 38.1 R: 3.48	Good	C: Good S: Good B: Good	Located in grassland; historic pruning around the crown break, wounds approximately between 20mm and 40mm - circa 10 percent occlusion.			B.1 20+ yrs
Age Classifications:		N Y SM	Newly planted Young Semi-mature	EM M OM	Early Mature Mature Over Mature	Condition:		C S B	Crown Stem Basal area	Stems:		Ø (Eq)	Diameter Equivalent stem diameter using BS5837:2012 definition	ERC: Estimated Remaining Contributio	

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment			
T05													
Austrian Pine <i>Pinus nigra ssp. Nigra</i>	17	1	660	N E S W	5 3.5 7 6.5	3 9 4 2	M A: 197.1 R: 7.92	Good	C: Good S: Good B: Good	Located in grassland adjacent to a road; historic pruning around the southern half of the main stem, likely to clear the adjacent road wounds approximately between 60mm and 120mm - no occlusion visible from ground level; asymmetrical crown distribution due to neighbouring trees.			B.1 40+ yrs
T06													
Scots Pine <i>Pinus sylvestris</i>	16	1	470	N E S W	4 2 5 2	9 10 6 9	M A: 99.9 R: 5.63	Decline	C: Poor S: Ivy B: Not visible	Located in grassland adjacent to a road; unable to thoroughly inspect the stem and base due to ivy coverage; ivy from base to approximately 12m; crown density approximately 20 percent with necrotic needles indicating near or recent death; deadwood within the canopy approximately between 20mm X 200mm and 40mm X 3m.			U <10 yrs
T07													
Austrian Pine <i>Pinus nigra ssp. Nigra</i>	21	1	700	N E S W	6 6.5 7.5 4.5	3 9 4 2	M A: 221.7 R: 8.4	Good	C: Good S: Ivy B: Not visible	Located in grassland adjacent to a road; unable to thoroughly inspect the stem and base due to ivy coverage - ivy from base to 9m.			B.1 40+ yrs
T08													
Pear <i>Pyrus sp.</i>	4	1	80	N E S W	2.5 2.5 2 2	1 1 1 1	EM A: 2.9 R: 0.96	Good	C: Good S: Good B: Good	Located in grassland; memorial tree; recorded stem diameter denotes average at 1.5m.			C.1.3 20+ yrs
T09													
Common Beech <i>Fagus sylvatica</i>	14	1	530	N E S W	5.5 6.5 6 6	3 3 3 3	M A: 127.1 R: 6.36	Good	C: Good S: Good B: Good	Located in grassland; historic pruning around the lower canopy consistent with crown lifting works - wounds between 20mm and 110mm, between full and 20 percent occlusion.			B.1 40+ yrs
Age Classifications:	N Y SM	Newly planted Young Semi-mature	EM M OM	Early Mature Mature Over Mature	Condition:		C S B	Crown Stem Basal area	Stems:	Ø (Eq)	Diameter Equivalent stem diameter using BS5837:2012 definition	ERC:	Estimated Remaining Contributio

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment			
T10													
Whitebeam <i>Sorbus aria</i>	10	1	410	N E S W	3 3 4 4	3.5 2.5 2.5 2	M A: 76.1 R: 4.92	Good	C: Good S: Good B: Good	Located in grassland; historic pruning around the lower canopy and main stem, consistent with crown lifting works - wounds approximately between 20mm and 60mm, between full and 50 percent occlusion.			B.1 20+ yrs
T11													
Wild Cherry <i>Prunus avium</i>	4.5	1	140	N E S W	2 1.5 2 2	1 1 1 1	SM A: 8.9 R: 1.68	Good	C: Good S: Good B: Good	Located in grassland.			C.1 20+ yrs
T12													
Cider Gum <i>Eucalyptus gunnii</i>	5	1	250	N E S W	3.5 4.5 3.5 1	1 1 2 2.5	EM A: 28.3 R: 3	Good	C: Good S: Good B: Good	Located in grassland; memorial tree; main stem angle approximately 30 degrees from vertical towards the east; asymmetrical crown distribution due to the stem angle.			B.1.3 20+ yrs
T13													
Mountain Ash <i>Sorbus aucuparia</i>	7.5	1	260	N E S W	2.5 4.5 3.5 2	2 2 1.5 2	M A: 30.6 R: 3.12	Good	C: Good S: Fair B: Good	Located in grassland; main stem angle approximately 30 degrees from apex towards the east; bark damage consistent with machinery from base to approximately 1.5m on the western side of main stem; historic pruning around the crown break consistent with crown lifting works - wounds approximately between 20mm and 40mm diameter, between 20 percent and full occlusion.			B.1 20+ yrs
T14													
Leyland Cypress <i>X Cupressocyparis leylandii</i>	13	1	340	N E S W	3 3 5 3.5	6 2 2 3	M A: 52.3 R: 4.08	Good	C: Good S: Not visible B: Not visible	Offsite tree; unable to thoroughly inspect the stem and base due to the location.			B.1 20+ yrs
Estimated Measurements													
Age Classifications:	N Y SM	Newly planted Young Semi-mature	EM M OM	Early Mature Mature Over Mature	Condition:		C S B	Crown Stem Basal area	Stems:	Ø (Eq)	Diameter Equivalent stem diameter using BS5837:2012 definition	ERC:	Estimated Remaining Contributio

Tree and Tag No Species		Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations		Cat ERC
			No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment		
T15											Estimated Measurements		
Lawson Cypress		10	1	230	N	2	3	M	A: 23.9	Good	C: Good		B.1
Chamaecyparis lawsoniana					E	2	2		R: 2.75		S: Not visible	Offsite tree; unable to thoroughly inspect the stem and base due to the location.	20+ yrs
					S	2	2				B: Not visible		
					W	2	2						

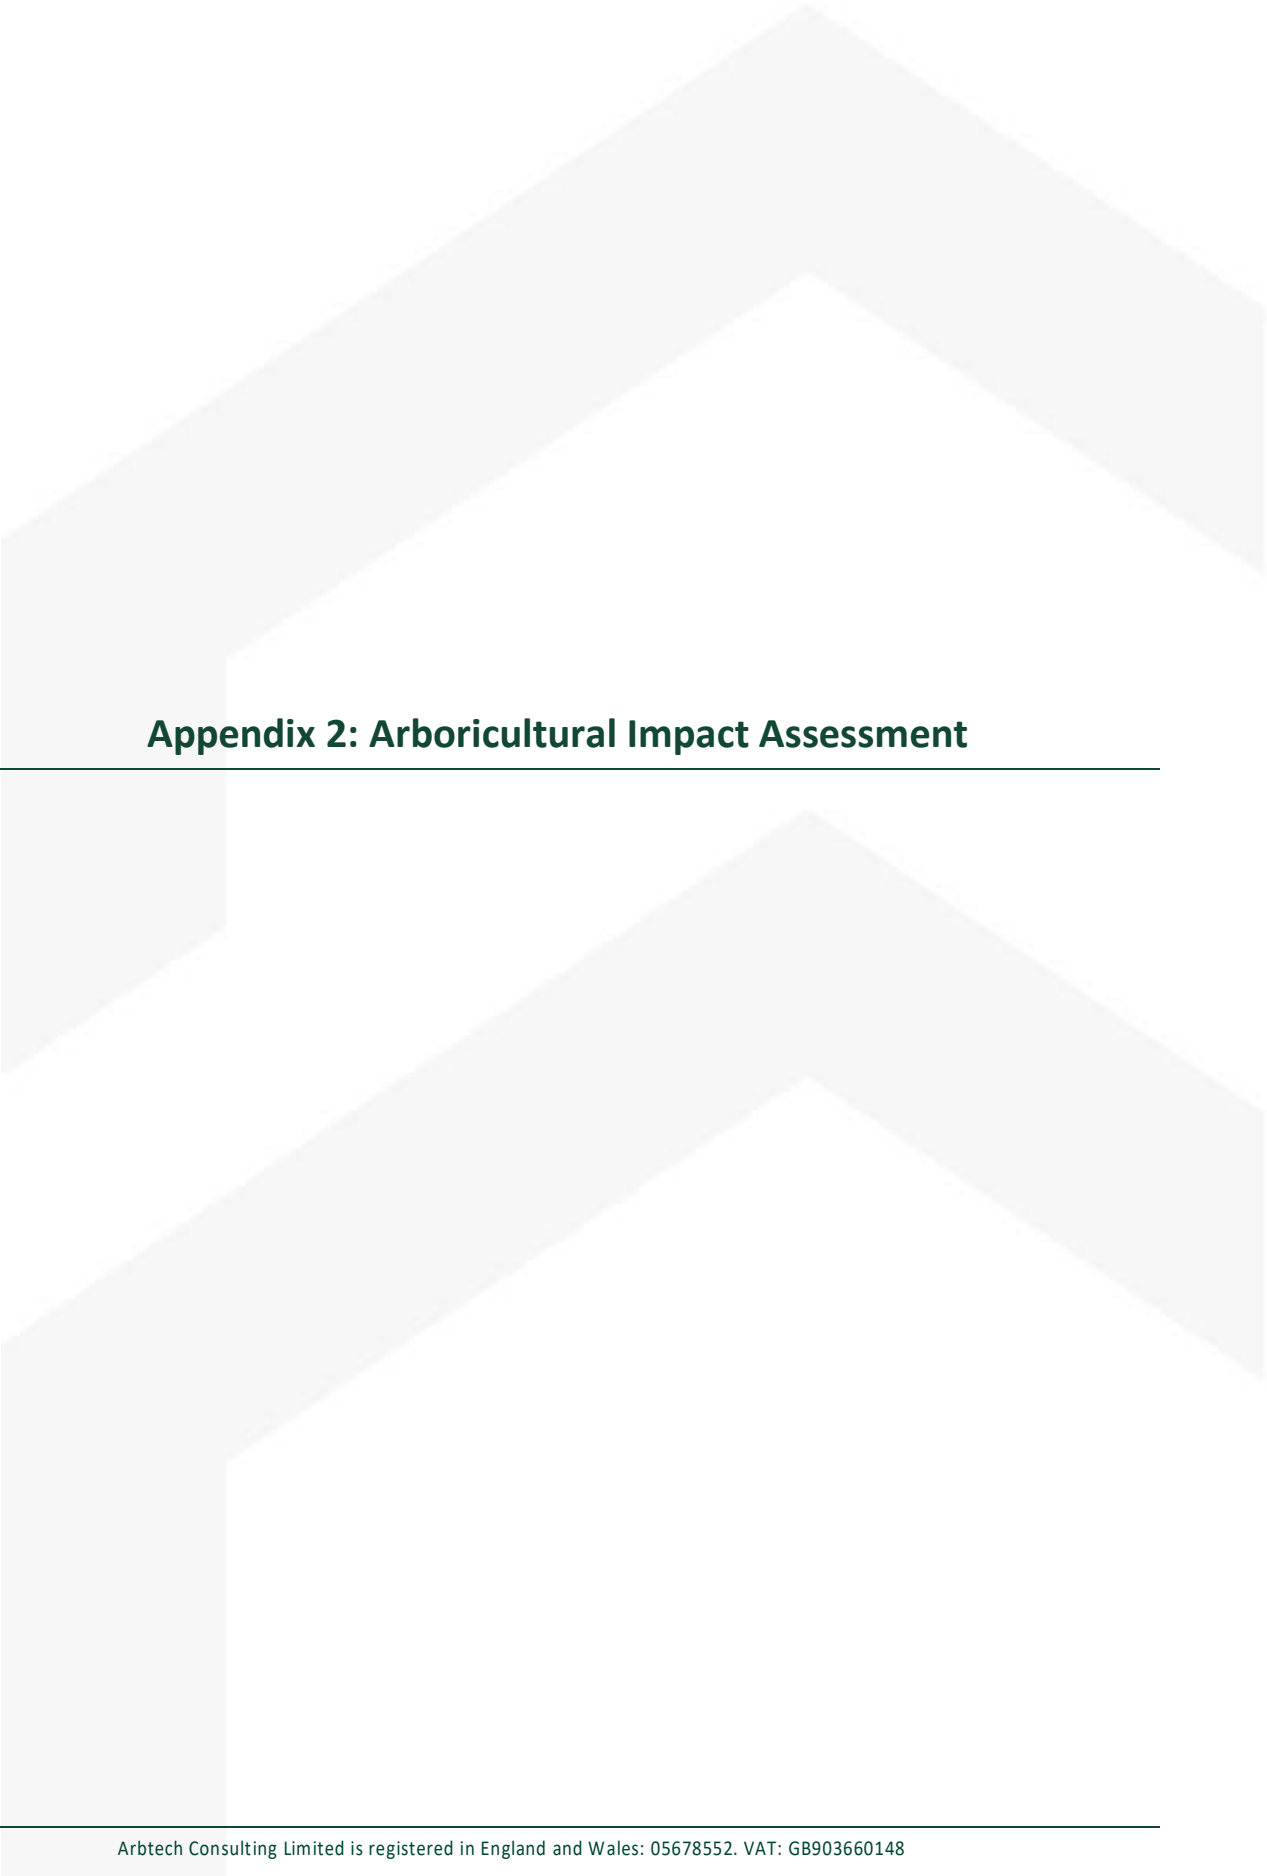

Appendix 2: Arboricultural Impact Assessment

Tree Categories

Trees are categorised in accordance with the cascade chart in Table 1 of the British Standards (BS5837:2012 Trees in Relation to Design, Demolition and Construction - Recommendations).

Category **U** - Trees in such condition that they cannot realistically be retained as living trees in context of the current land use for longer than 10 years.

Category **A** - Trees of high quality with an estimated remaining life expectancy of at least 40 years.

Category **B** - Trees of moderate quality with an estimated remaining life expectancy of at least 20 years.

Category **C** - Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 130mm.

Root Protection Area (RPA)

In order to avoid damage to the roots or rooting environment of retained trees, the RPA should be plotted around each of the category **A**, **B** & **C** trees. This is a minimum area (m²) which should be left undisturbed around each retained tree.

The RPA is calculated using the British Standard (BS5837:2012 Trees in Relation to Design, Demolition and Construction - Recommendations). The calculated RPA is capped at 707m², which is the equivalent to a circle with a radius of 15m.

Tree Survey Report

Please refer to Arbtch Consulting Ltd. Tree Survey Report (TSR) and Tree Schedule (TS) for full details on all surveyed trees, hedgerows and major shrub groups.

All trees were surveyed and categorised in accordance with the guidance as set out in British Standards (BS5837:2012 Trees in Relation to Design, Demolition and Construction - Recommendations).

Utility Apparatus

Underground utility apparatus:

Mechanical trenching for the installation of underground apparatus and drainage serves any roots present and can change the local hydrology in a way that adversely affects the health of trees. For this reason, particular care should be taken in the route and methodology of installation for all underground apparatus. Wherever possible, apparatus should be routed outside of the RPAs, where this is not possible, it is preferable to keep apparatus together in common ducts. All inspection chambers should be sited outside of RPAs.

Where underground apparatus is to pass within the RPAs, detailed plans showing the proposed route should be drawn up in conjunction with the Project Arboriculturalist. In such cases trenchless insertion methods should be used with entry and retrieval pits being located outside of the RPAs. If this option is not feasible and providing roots can be retained and protected, manual excavations using hand held tools (air-spade, forks, shovels etc.) or a combination of trenchless and manual excavations (broken trench) should be used.

Any design and installation must be undertaken in accordance with National Joint Utilities Guidelines (NUJG).

Above-ground utility apparatus:

Above-ground apparatus (including CCTV cameras and lighting) should be sited to avoid the need for detrimental tree pruning, as such the current and future crown size of the tree should be assessed.

Tree branches can be pruned back with care to provide space, though it is not appropriate for repetitive and significant tree works to an initial design solution unless this is a suitable management outcome for the tree. Any pruning must be undertaken in accordance with BS3998:2010.

Arboricultural Method Statement

All tree works must be undertaken in accordance with British Standards. Please refer to the Tree Schedule, Arboricultural Method Statement & Tree Protection Plan, for full details of all surveyed trees and how the development may be implemented without detriment to retained trees.

Arboricultural Impacts

Impacts	No. of Trees
Trees to be removed	0
Drains / Hedgerows to be removed (Partial removal)	1 (0)
Trees with proposed removal into the site	0
Drains / Hedgerows with proposed incursions into the RPAs	0
Trees that require pruning	0
Drains / Hedgerows that require pruning	1
Trees to be transplanted	0
Drains / Hedgerows to be transplanted	0

Tree Work Schedule

No.	Species	Work	Category
T01	Various	Cut back to canopy or above at sign	C.2
H04	Various	Removal of trees (vegetation) within site boundary, grid 40000	B.2

All tree work is to be undertaken in accordance with British Standards (BS3998:2010) Tree Work - Recommendations. All categories are to be removed and the site left as it was found. Care is to be taken to ensure that the ground around retained trees does not become compacted as a result of tree surgery operations. No equipment or vehicles such as that not better to enter trees, trunks, excavators, or cranes are to be parked or driven towards the crown of any retained trees to prevent equipment, construction and soil damage.

No. Individual Trees to be Retained				
U	A	B	C	
0	0	0	0	0

No. Groups / Hedgerows to be Retained				
U	A	B	C	
0 (0)	0 (0)	1 (0)	0 (0)	0 (0)

(1) = Partial removal.

Rev: 1 Date: 20/03/2025 Initial Assessment

Notes:

arbtech

Unit 3, Well House Barns, Chester, CH4 0DH
<https://arbtech.co.uk> 01244 661170

Project: The Emmbrook School
Wokingham
Berkshire
RG41 1JP

Client: Orbis Ltd

Drawing: Arboricultural Impact Assessment

Based on: EMM-HLM-ZZ-00-DR-A-00101_P04

Drawing No: Arbtech AIA 01 Rev: --

Date: Oct-2025 Scale: 1:200@ A0 Drawn: PDG

Key:

Existing Site Layout	Proposed Site Layout	Tree Numbers	T01
Tree Trunks	Root Protection Area	Tree Canopy	
Category 'A' Tree	Category 'A' Group	Category 'B' Tree	
Category 'B' Tree	Category 'B' Group	Category 'C' Tree	
Category 'C' Tree	Category 'C' Group	Category 'U' Tree	
Category 'U' Tree	Category 'U' Group	Trees to be Retained	604

Pruning:

Pruning	
---------	--

All dimensions should be checked on site. No dimensions are to be quoted from this drawing. Please note that all of any discrepancies found, Arbtch Consulting Ltd. cannot be held responsible for any consequences of the work shown on this drawing. The client, Orbis Ltd, and its representatives are responsible for the accuracy of the information provided to the client. The client, Orbis Ltd, and its representatives are responsible for the accuracy of the information provided to the client. The client, Orbis Ltd, and its representatives are responsible for the accuracy of the information provided to the client.

This drawing is not to be used as a substitute for the engineering or construction details or method of construction. It is the responsibility of the client, Orbis Ltd, and its representatives to ensure that the drawing is used in accordance with the requirements of the relevant standards and specifications. The client, Orbis Ltd, and its representatives are responsible for the accuracy of the information provided to the client.

Arbtech Consulting Ltd. 2025



Appendix 3: Tree Protection Plan

Protective Fencing (Tree

Protective fencing is to be erected prior to the commencement of any and all works on site and retained in place for the duration of the development.

Secondary Specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabilizer struts, which should be attached to a base plate and secured with ground pins.

All weather notices are to be attached at regular intervals on the weld mesh panels with words such as "Construction Exclusion Zone - KEEP OUT".

Tree Protection Area
KEEP OUT
Do not move this fence

TOWN & COUNTRY PLANNING ACT 1990)
TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS
AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER.
CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION.

ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN
PERMISSION OF THE LOCAL PLANNING AUTHORITY



Ground Protection

The existing hard surfacing within the RPA of retained trees provides passive protection against compaction to the underlying soil and therefore must be retained for the duration of the project. If removed, it shall be done so manually and under the direct supervision of the Project Arboriculturist; it must be replaced immediately with either the new hard surface treatment or with suitable ground protection, capable of withstanding the likely loading for the site.

New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

Note: The ground protection might comprise one of the following:

Pedestrian movements only: A single thickness of scaffold boards placed either on top of a driven scaffold frame, as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;


Pedestrian-operated plant up to 2t (gross weight): Proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150mm depth of woodchip), laid onto a geotextile membrane;

Wheeled/Tracked traffic exceeding 2t (gross weight): An alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to be designed by a suitably qualified person to a engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.


In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath, so that tree root function remains unimpaired.

Arboricultural Method Statement

All tree works must be undertaken in accordance with British Standards. Please refer to the Tree Schedule, Arboricultural Method Statement & Tree Protection Plan, for full details of all surveyed trees and how the development may be implemented without detriment to retained trees.

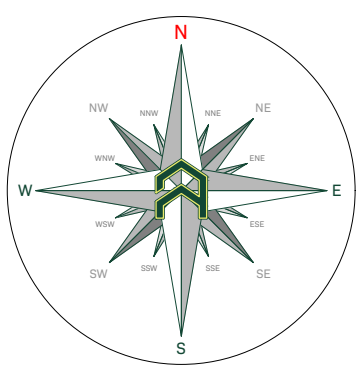

Indicative
only



Tree Work Schedule			
No.	Species	Works	Category
H01	Various	Cut back to boundary as shown on plan	C2
004	Various	Removes all trees/vegetation within site boundary, ground floor	B2

All tree work is to be undertaken in accordance with British Standards BS3398:2010 Tree Work - Recommendations. All arising's are to be removed and the site left as it was found. Care is to be taken to ensure that the ground around retained trees does not become compacted as a result of tree surgery operations. No equipment or vehicles such as (but not limited to) timber lories, tractors, excavators, or cranes are to be parked or driven beneath the crowns of any retained trees to prevent subsequent compaction and root death.

Arboricultural Supervision

The Project Arboriculturist will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:

1. Pre-commencement site meeting;
2. Location of protective measures;
3. Any excavations within and immediately adjacent to RPAs, including foundations, hard surfacing, or underground services (a non-exhaustive list);
4. Removal of protective measures and sign-off.

Rev:	Date:	Notes:



Unit 3, Well House Barns, Chester, CH4 0DH
<https://arbtech.co.uk>, 01244 661170

Project:

The Emmbrook School
Wokingham
Berkshire
RG41 1JP

Client: Orbis Ltd

Drawing: **Tree Protection Plan**

Based on:
EMM-HLM-ZZ-00-DR-A-00101_P04

Drawing No:	Rev:
Arbtech TPP 01	--

Date:	Scale:	Drawn:
Oct-2025	1:200 @ A0	PDG

Key:				
Existing Site Layout:		Proposed Site Layout:		Tree Numbers: T01
Tree Trunks:		Root Protection Area:		Tree Canopy:
Category 'A' Tree:		Category 'A' Group:		Category 'B' Tree:
Category 'B' Group:		Category 'C' Tree:		Category 'C' Group:
Category 'U' Tree:		Category 'U' Group:		Trees Removed:

All dimensions should be checked on site. No dimensions are to be scaled from this drawing. Please notify us of any discrepancies found. Artech Consulting Ltd. cannot be held responsible for inaccuracies in the base drawing in which this plan is based. This drawing is designed to reflect the principles of the layout or design only, and relates only to the provision of retained levels. This drawing is not to be read as a definitive part of the engineering or construction designs or method statement. An architect or structural engineer should be contacted over any matters of construction, detailing or specification and for any standards or regulatory requirements relating to proposed structures, base surfacing or underground services. This drawing was produced in color - a monochrome copy should not be relied upon.

© Artech Consulting Ltd, 2025



Appendix 4: Tree Protection Notice

Tree Protection Area **KEEP OUT**

Do not move this fence

(TOWN & COUNTRY PLANNING ACT 1990)

**TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS
AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER.
CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION**

**ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN
PERMISSION OF THE LOCAL PLANNING AUTHORITY**



Unit 3, Well House Barn, Chester Road, Chester, CH4 0DH
<https://arbtech.co.uk> - 01244 661170



Appendix 5: Contact Details

Name	Position	Company	Contact
	Client		
	Agent / Project Manager		
	Tree Officer		
	Project Arboriculturist	Arbtech Consulting Ltd.	01244 661170 https://arbtech.co.uk
	Site Manager		
	Main contractor		

Document Production Record

Document number	Author	Signature	Position	Issue number	Date
Arbtech AMS 01	Phil Gower		Technical Manager (Arboriculture)	01	30/10/25

Report Limitations

Arbtech Consulting Ltd has prepared this report for the sole use of the above-named Client/Agent in accordance with our terms of business, under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this report or any other services provided by us. This report may not be relied upon by any other party without the prior and express written agreement of Arbtech Consulting Ltd. The assessments made assume that the sites and facilities will continue to be used for their current purpose without significant change. The conclusions and recommendations contained in this report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from third parties has not been independently verified by Arbtech Consulting Ltd.

Copyright

© This Report is the copyright of Arbtech Consulting Ltd. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.