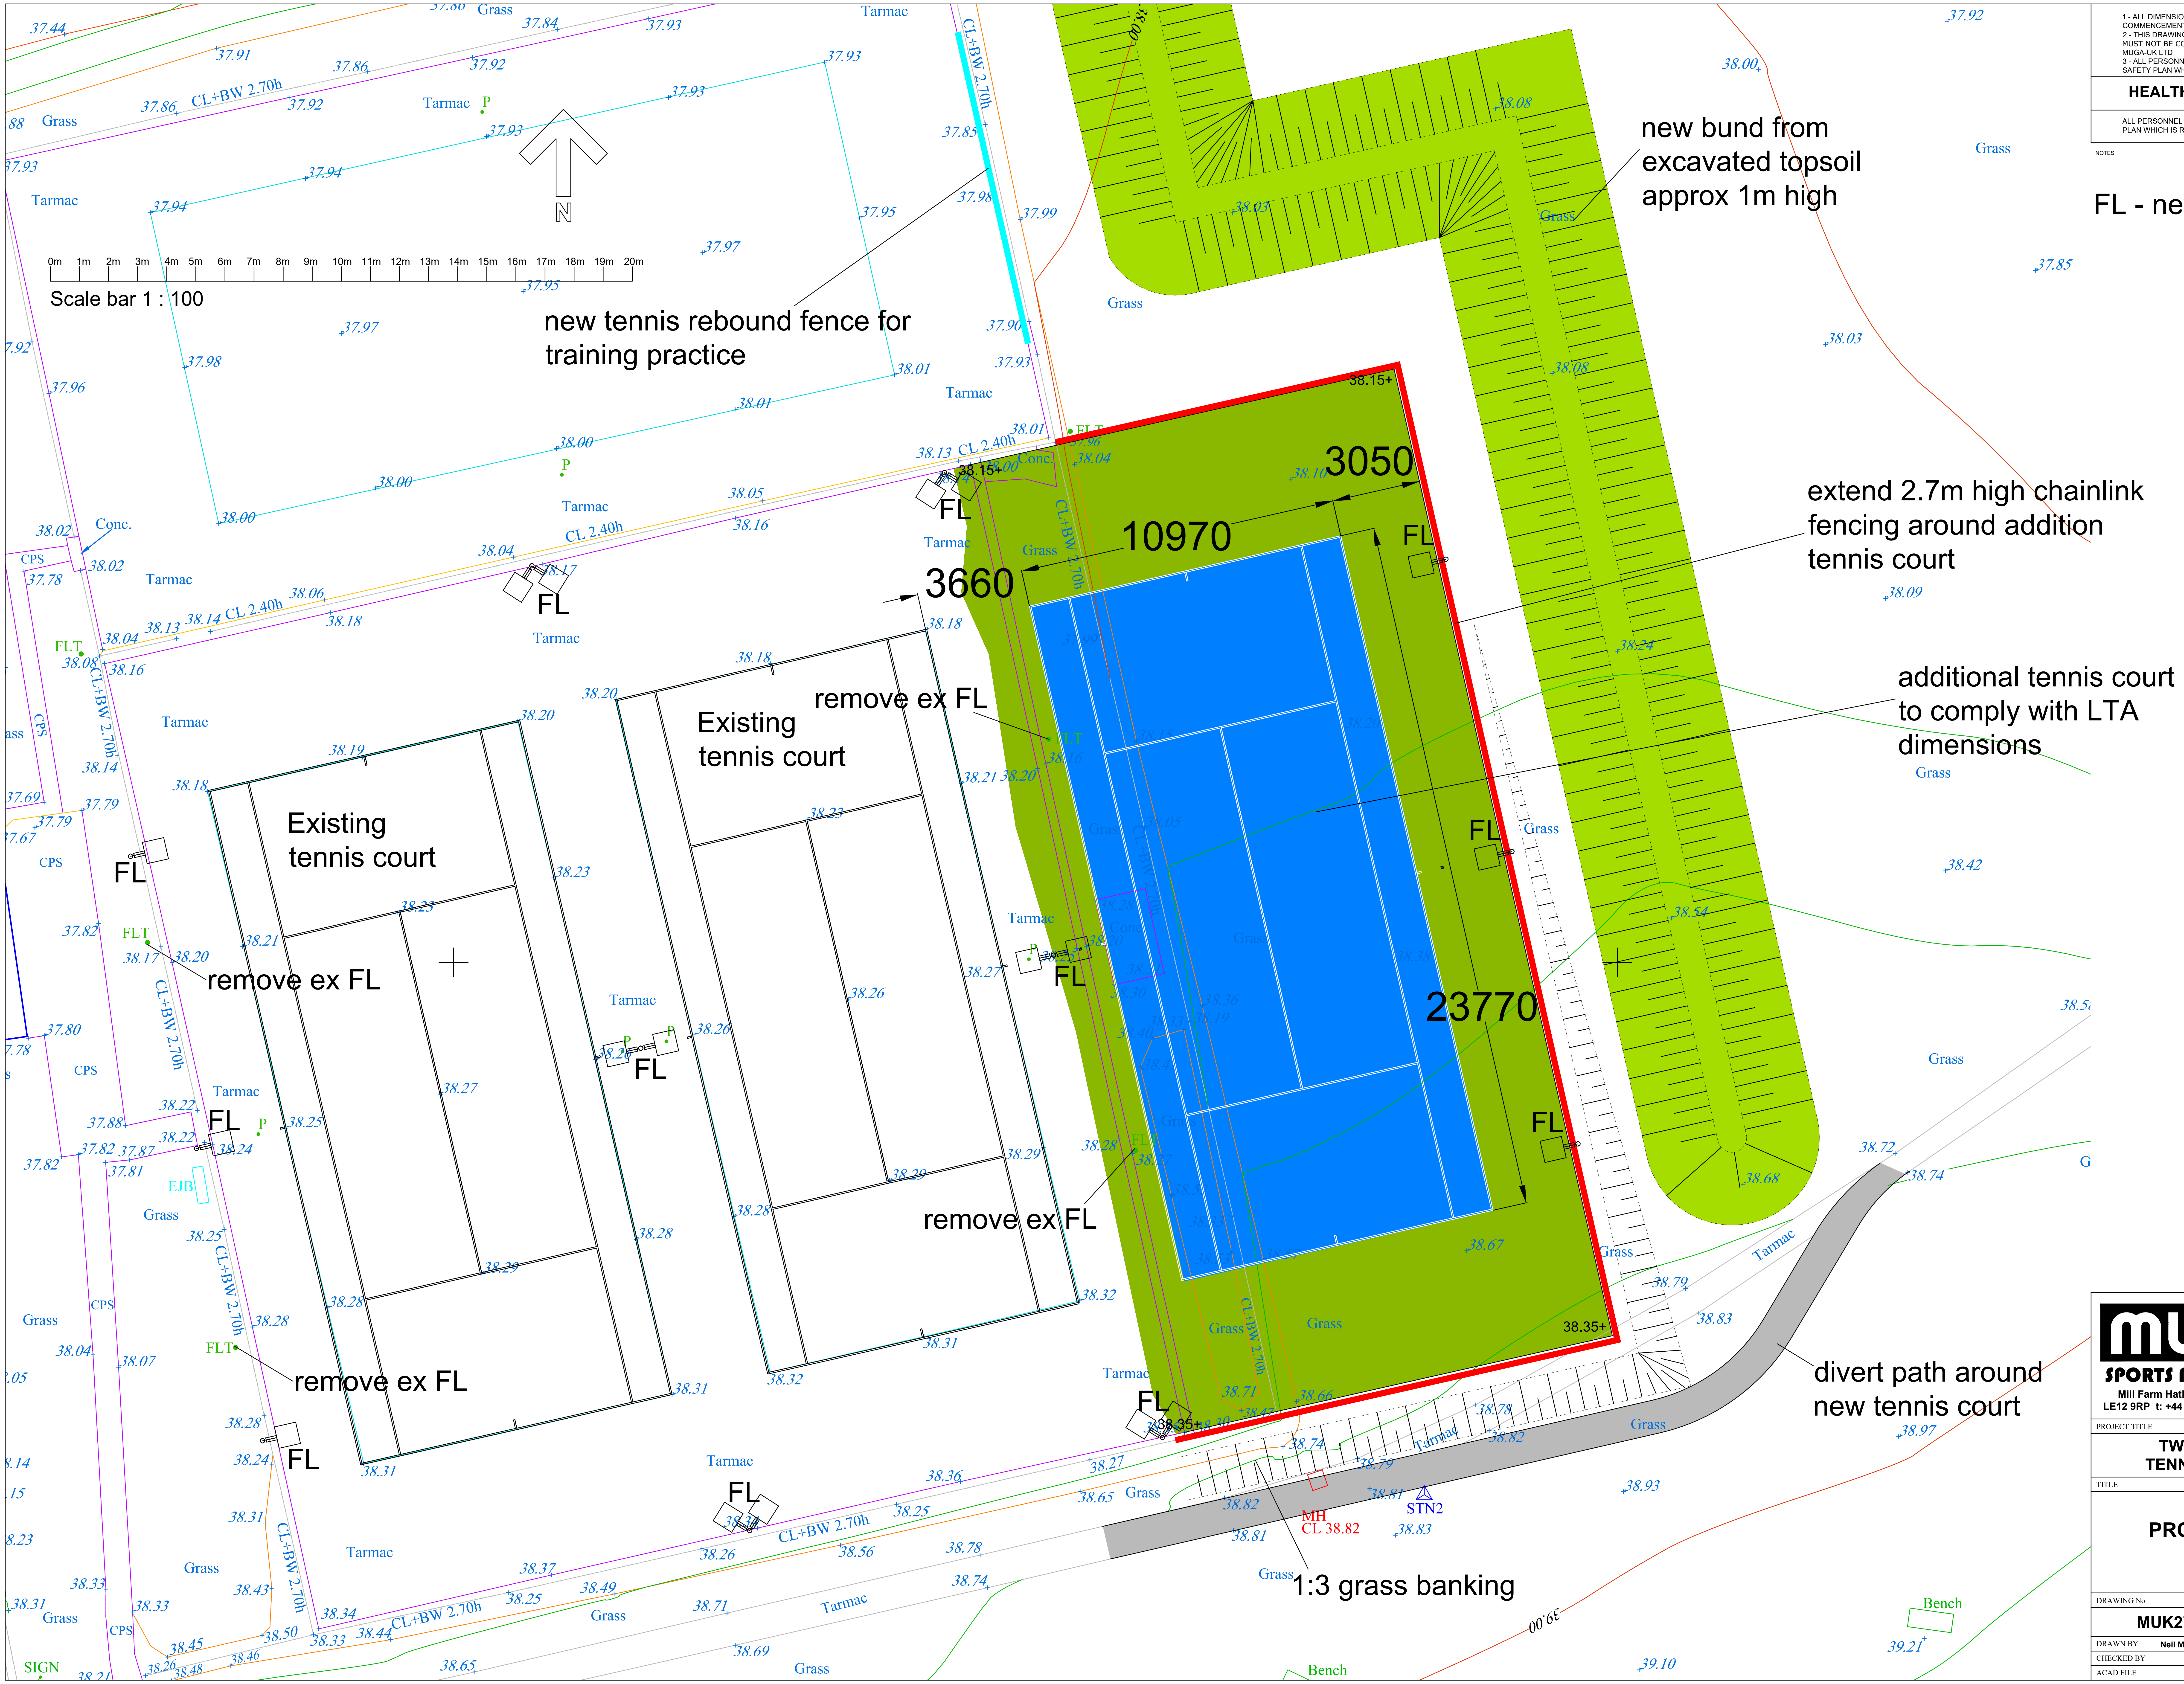
new bund from excavated topsoil approx 1m high
new tennis rebound fence for training practice
extend 2.7m high chainlink fencing around addition tennis court
additional tennis court to comply with LTA dimensions
divert path around new tennis court
1:3 grass banking
Existing tennis court
Existing tennis court
remove ex FL
remove ex FL
remove ex FL
remove ex FL
FL
3050
10970
3660
23770
38.15+
38.35+
N
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m 11m 12m 13m 14m 15m 16m 17m 18m 19m 20m
Scale bar 1 : 100
Tarmac
Grass
CL+BW 2.70h
CL 2.40h
MH
CL 38.82
STN2
Bench
SIGN

1 - ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORKS.
2 - THIS DRAWING IS © COPYRIGHT. THIS DRAWING AND DESIGN MUST NOT BE COPIED OR USED WITHOUT THE EXPRESS CONSENT OF MUGA-UK LTD
3 - ALL PERSONNEL SHOULD BE AWARE OF THE HEALTH AND SAFETY PLAN WHICH IS RETAINED IN THE SITE MANAGERS OFFICE

HEALTH AND SAFETY NOTE

ALL PERSONNEL SHOULD BE AWARE OF THE HEALTH AND SAFETY PLAN WHICH IS RETAINED IN THE SITE MANAGERS OFFICE

NOTES

FL - new floodlights

MUGA UK
SPORTS PITCH CONSULTANTS
Mill Farm Hathern Road Shepshed Leicestershire
LE12 9RP t: +44 (0) 1509 503408 f: +44 (0) 1509 506420

PROJECT TITLE	PROJECT NUMBER
TWYFORD TENNIS CLUB	MUK2794

TITLE

PROPOSED PLAN

DRAWING No	REV	SCALE
MUK2794-04	B	1:100

DRAWN BY	Neil McHugh	DATE	27-07-22
CHECKED BY		SIZE/PLOT	A1
ACAD FILE			