

GHA Trees
5 South Drive
High Wycombe
Bucks
HP13 6JU



Glen Harding MSc (Forestry), MArborA
t: 07884 056025
e: info@ghatrees.co.uk
www.ghatrees.co.uk

**BS5837:2012 TREE SURVEY AND
ARBORICULTURAL IMPACT ASSESSMENT:
Clear View Cottage, Whistley Green, RG10 0DU**

Dated: 2nd April 2026

Our reference: GHA/DS/160346:26

CONTENTS

Section	Subject	Page
	Instructions	3
	Executive Summary	3
	Documents Supplied	4
	Scope of Survey	4
	Survey Method	5
	The Site	6
	Subject Trees	6
	The Proposal	6
	Arboricultural Impact Assessment	6
	Post Development Pressure	8
	Tree Protection Measures and Preliminary Method Statement for Development Works	8
	Conclusion	10
	Recommendations	10
Appendix A	Site Plan / Arboricultural Impact Plan (Attached as a separate PDF file to maintain its integrity / accuracy)	
Appendix B	Tree Table	
Appendix C	Extract from BS5837:2012 – Protective Fencing	

Arboricultural Impact Assessment

Location: Clear View Cottage, Whistley Green, RG10 0DU
Our reference: GHA/DS/160346:26
Client: Hives
Dated: 2nd April 2026
Prepared by: Glen Harding MICFor, MSc (Forestry), MArborA
Date of Inspection: 28th March 2026

Instructions

Issued by – Hives

TERMS OF REFERENCE – GHA Trees were instructed to survey the subject trees within and adjacent to Clear View Cottage, Whistley Green, in order to assess their general condition and to provide a planning integration statement for the indicative proposed development that safeguards the long term wellbeing of the retained trees in a sustainable manner.

The writer retains the copyright of this report and its content is for the sole use of the client(s) named above. Copying of this document may only be undertaken in connection with the above instruction. Reproduction of the whole, or any part of the document without written consent from GHA Trees is forbidden. Tree work contractors, for the purpose of tendering only, may reproduce the Schedule for tree works included in the appendices.

Executive Summary

The proposal is for a full application for the proposed erection of 1 no. detached dwelling following demolition of the existing dwelling, plus erection of a detached car port with first floor storage, a front wall and gate, associated landscaping and installation of PV panels on an existing outbuilding. The proposed scheme requires the removal of a small number of relatively insignificant (C category) trees and shrubs, which will not significantly impact the local or wider landscape. A small number of relatively insignificant (C category) shrubs will also be removed, which will not significantly impact the local or wider landscape. The development presents an excellent opportunity to plant some new trees, to enhance the site and local area for the future. The retained trees require protection in accordance with industry best practice and BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations, in order to ensure their longevity.

Documents Supplied

The client supplied the following documents:

- Existing layout plans
- Proposed layout plans

Scope of Survey

- 1.1 The survey is concerned with the arboricultural aspects of the site only.
- 1.2 This is **not** a full tree safety survey and should not be viewed or used as such.
- 1.3 The planning status of the subject property was not investigated in detail.
- 1.4 A qualified Arboriculturist undertook the report and site visit and the contents of this report are based on this. Whilst reference may be made to built structure or soils, these are only opinions and confirmation should be obtained from a qualified expert as required.
- 1.5 Trees in third party ownership were surveyed from within the subject property, therefore a detailed assessment was not possible and some (if not all) measurements were estimated. Where the stem location of a third party tree has been estimated, this is noted on the plan.
- 1.6 Dense vegetation or climbers (such as ivy) also prohibited full inspections for some trees; this is noted where applicable.
- 1.7 No discussions took place between the surveyor and any other party.
- 1.8 The trees were inspected on the basis of the Visual Tree Assessment method expounded by Mattheck and Breleor (The body language of tree, DoE booklet Research for Amenity Trees No. 4, 1994)
- 1.9 The survey was undertaken in accord with British Standard 5837: 2012 – Trees in relation to design, demolition and construction – recommendations.
- 1.10 The client's attention is drawn to the responsibilities under the Wildlife and Countryside Act (1981).

Survey Method

- 2.1 The survey was conducted from ground level with the aid of binoculars if needed.
- 2.2 No tissue samples were taken nor was any internal investigation of the subject trees undertaken.

- 2.3 No soil samples were taken.
- 2.4 The height of each subject tree was estimated using a clinometer and recorded to the nearest half metre.
- 2.5 The stem diameter for each tree was measured in line with the requirements set out in BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations.
- 2.6 The crown spreads were measured with an electronic distometer and recorded to the nearest half metre. Where the crown radius was notably different in any direction this has been noted on the Plan (appendix A) and within the tree table (Appendix B). The crowns of those trees that are proposed for removal, or trees where the crown spread is deemed insignificant in relation to the proposed development are not always shown on the appended plan; however their stem locations are marked for reference.
- 2.7 The Root Protection Area (RPA) for each tree is included in the tree table, both as an area, and as the radius of a circle.
- 2.8 The crown clearance was measured using a clinometer and recorded to the nearest half metre. Where it is significantly lower in one direction, this is noted within the tree table at appendix B.
- 2.9 All of the trees that were inspected during the site visit are detailed on the plan at Appendix A; this plan was produced in colour and **MUST** only be scanned or reproduced in colour. The trees on this plan are categorised and shown in the following format:

COLOUR CODING AND RATING OF TREES:

Category A – Trees of high quality with an estimated remaining life expectancy of at least 40 years. Colour = light green crown outline on plan.

Category B – Trees of moderate quality with an estimated remaining life expectancy of at least 20 years. Colour = mid blue crown outline on plan.

Category C – Trees of low quality with an estimated remaining life expectancy of at least 10 to 20 years, or young trees with a stem diameter below 150mm. Colour = uncoloured crown outline on plan.

Category U – Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years. Colour = red crown outline on plan.

All references to tree rating are made in accordance with BS 5837: 2012 – Trees in relation to design, demolition and construction – recommendations’, Table 1.

The Site

- 3.1 The site is located to the south of Whistley Green village.
- 3.2 Access to the property is currently gained via a driveway to the front of the site.

The Subject Trees

- 4.1 The details of the subject trees are set out in the Schedule at Appendix B.

The Proposal

- 5.1 The proposal is for a full application for the proposed erection of 1 no. detached dwelling following demolition of the existing dwelling, plus erection of a detached car port with first floor storage, a front wall and gate, associated landscaping and installation of PV panels on an existing outbuilding.
- 5.2 The proposed location of the above structures can be seen on the appended plan.

Arboricultural Impact Assessment

PROPOSED TREE REMOVAL:

- 6.1 T1, a section of G5, T7 and T8 are proposed for removal as part of the new development, as these specimens could not be effectively retained as they are located within the outline of the new structures, or located too close to make their retention feasible / sustainable.
- 6.2 All of the trees to be removed have been given a C category grading in accordance with BS 5837. It is therefore felt that these trees should not act as a limitation on the effective use of the site, or impose any significant constraints on the layout (see table 1 BS5837).
- 6.3 The assessed grading (as per BS5837 table 1) of each of the trees to be removed, as well as any relevant comments on their condition can be seen in the tree table at appendix B.
- 6.4 A small number of relatively insignificant (C category) shrubs will be removed, which will not significantly impact the local or wider landscape.

TREE PRUNING TO ACCOMMODATE THE PROPOSAL OR ACCESS TO THE SITE

- 6.5 The implementation of the proposal does not lead to the requirement to prune any of the retained trees.
- 6.6 There is no part of the new structure which will have tree canopies (from trees to be retained) overhanging it and the building works can progress safely without the need for any facilitation pruning.

ASSESSMENT OF RETAINED TREES ROOT PROTECTION AREAS

- 6.7 Section 4.6.3 of BS 5837: 2012 states that the Root Protection Area (RPA) of each tree should be assessed by an arboriculturalist considering the likely morphology and disposition of the roots, when known to be influenced by past or existing site conditions.
- 6.8 The assessed RPAs (excluding the RPAs of U category trees and those trees which are proposed for removal) can be seen on the appended plan where some have amended to take account of the existing structures.

ASSESSED IMPACT ON RPAS BY PROPOSED STRUCTURES

- 6.9 There is a small encroachment into the RPA of T2; this encroachment equates to ~1.5% and is therefore assessed to be within acceptable levels. This is a healthy tree which will tolerate this small amount of root loss and recover quickly, especially when considering no other part of the RPA is affected and there are large areas of open ground to the other side of the RPA for compensatory root growth to develop. This tree has been graded as a C category tree in accordance with BS 5837: 2012 – Table 1, and should therefore not act as a limitation on the effective use of the site, or impose any constraints on the layout.
- 6.10 The proposed new structures are situated outside of the assessed RPAs of all of the other trees proposed for retention; therefore, these trees pose no below ground constraints on the new structures or vice versa.

INSTALLATION OF SERVICES

- 6.11 The full details of existing and proposed new services have not been made available at the time of writing.
- 6.12 New services must be routed to avoid all RPAs of retained trees on site and within nearby sites. From an assessment of the subject site, undertaken in conjunction with the project architect, there is no reason to assume this isn't possible. Inspection chambers must also be sited outside the RPAs of any nearby trees.

Post Development Pressure

FUTURE TREE AND STRUCTURE RELATIONSHIPS

- 7.1 The retained trees are at a satisfactory distance from the proposed new building and highly unlikely to give rise to any inconvenience.
- 7.2 Regular inspections of the retained trees by a suitably qualified Arboriculturalist and subsequent remedial works will ensure that the trees are maintained in a suitable manner, to exist in harmony with the new structures and its occupants for many years to come.

REMEDICATION / REPLACEMENT PLANTING

- 7.3 An assessment of suitable planting sites within the proposed development area confirms that the loss of trees discussed in section 6.1 can be addressed by the planting of new trees that would complement the existing landscape.
- 7.4 Any new trees that are planted should be selected to ensure they do not become a nuisance and that the level of routine maintenance is low.

HARD LANDSCAPING

- 7.5 All new pathways and hard landscaping areas within the Root Protection Areas (RPAs) of the retained trees should be designed using no-dig, up and over construction and in close co-ordination with the retained Arboriculturalist using porous materials.

Tree Protection Measures and Preliminary Method Statement for Development Works

8.1 TREE PROTECTION BARRIERS


It is essential for the future health of the trees to be retained on site, that all development activity is undertaken outside the root protection zone of these trees. The position of the fence **MUST** be marked out with biodegradable marker paint on site and agreed with appropriate representatives from the contractor. The fencing **MUST** be erected **prior** to any works in the vicinity of the trees and removed only when all development activity is complete. The protective fencing **MUST** be as that shown in BS 5837 (see Appendix C). The herras panels **MUST** be joined together using a minimum of two anti-tamper couplers which **MUST** be installed so they can only be removed from the inside of the fence. The panels **MUST** supported by stabilizer struts, which **MUST** be installed on the inside and secured to the ground using pins or appropriate weights.

The Fence must be marked with a clear sign reading:

“Construction Exclusion Zone – No Access”

8.2 GROUND PROTECTION – LIGHTWEIGHT ACCESS ONLY

Where any additional ground protection is required, these areas **MUST** be covered with a permeable membrane, with 150mm layer of compressible woodchip overlaying it; an 18mm marine ply boards will then be secured on top of the woodchip to allow a 1.5tonne mini-digger to access the area without causing major compaction or soil erosion.

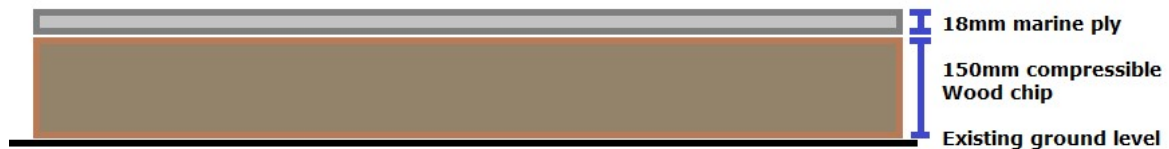

Above: ground protection make-up

8.3 SITE HUTS, WELFARE FACILITIES AND STORAGE OF EQUIPMENT, MATERIALS AND CHEMICALS

All site huts **MUST** be positioned outside of the retained trees RPAs.

8.4 MIXING OF CONCRETE

All mixing of cement / concrete **MUST** be undertaken outside of the RPA of all of the retained trees.

8.5 INCOMING SERVICES, DRAINAGE AND SOAKAWAYS

New services **MUST** be routed to avoid all RPAs of retained trees on site and within nearby sites. From an assessment of the subject site, undertaken in conjunction with the project architect, there is no reason to assume this isn't possible. Inspection chambers **MUST** be sited outside the RPA.

8.6 ON SITE SUPERVISION

Regular site supervision is essential to ensure all potentially damaging activities near to trees are properly supervised. A pre start site meeting **MUST** occur to ensure all parties are aware of their responsibilities relating to tree protection on site; this **MUST** include a site induction for key personnel.

Key personnel:

Name	Position	Contact number / email:
Glen Harding	Retained arboriculturalist	07884 056 025 Or info@ghatrees.co.uk
TBC	Local authority Arboricultural Officer	TBC
TBC	Site manager	TBC

After this pre start meeting, day-to-day responsibility for tree protection will be devolved to the site manager who will make contact with the retained arboriculturalist as needed.

8.7 OTHER TREE PROTECTION PRECAUTIONS

- **NO** fires lit on site within 20 metres of any tree to be retained.
- **NO** fuels, oils or substances which will be damaging to the tree shall be spilled or poured on site.
- **NO** storage of any materials within the root protection zone.

8.8 HARD LANDSCAPING NEAR RETAINED TREES

All new pathways and hard landscaping areas within the Root Protection Areas (RPAs) of the retained trees **MUST** be designed using no-dig, up and over construction techniques, and be specified in close co-ordination with the retained Arboriculturalist. Porous materials **MUST** also be used when surfacing near the trees. No machinery will be used for this work, which **MUST** all be done by hand.

8.9 TREE PLANTING

Some proposed locations for new trees can be seen on the landscape designers plans. Tree planting should be undertaken between the months of November and March by a suitably experienced contractor. The scheme should include the implementation of an aftercare package to include: weed management, tree hydration, stake and tie maintenance, replacement of any failures, mulching and formative pruning.

8.10 DISMANTLING PROTECTIVE BARRIERS

Protective barriers must only be completely removed when all machinery, and equipment has left site.

Conclusion

- 9.1 In conclusion, the principal arboricultural features within the site can be retained and adequately protected during development activities.
- 9.2 No significant or important trees will be lost to facilitate the proposed scheme.
- 9.3 Subject to precautionary measures as detailed above, the proposal will not be injurious to trees to be retained.
- 9.4 New trees can be planted following approval from the Local Planning Authority to ensure a sustainable tree stock for the future.

Recommendations

- 10.1 Site supervision – An individual e.g. the Site Agent, must be nominated to be responsible for all arboricultural matters on site. This person must:
 - a. Be present on the site the majority of the time.
 - b. Be aware of the arboricultural responsibilities.
 - c. Have the authority to stop any work that is, or has the potential to cause harm to any tree.

- d. Be responsible for ensuring that all site personnel are aware of their responsibilities towards trees on site and the consequences of the failure to observe those responsibilities.
- e. Make immediate contact with the local authority and / or retained arboriculturalist in the event of any related tree problems occurring whether actual or potential.

10.2 It is recommended, that to ensure a commitment from all parties to the healthy retention of the trees, that details are passed by the architect or agent to any contractors working on site, so that the practical aspects of the above precautions are included in their method statements, and financial provision made for these.

2nd April 2026

Signed:



Glen Harding MICFor, MSc (Forestry), MArborA
For and on behalf of GHA Trees

Appendix A
TREE PLAN
(see separate PDF)

Appendix B **TREE TABLE**

Tree Number	Tree Name (species)	Ht (m)	Calculated Stem Diameter (mm)	Number of Stems	Root Protection Area (Radius, m)	N (m)	E (m)	S (m)	W (m)	Age Class	Clearance (m)	Estimated life expectancy	BS Category	Comments / Recommendations
T1	Medlar	4	304	5	3.65	3	3	3	4	Mature	1.5	10-20 years	C1	Poor form, Multi-stemmed.Recommend: to be removed.
T2	Tulip	13	730	1	8.76	5	4.5	5	4	Mature	FMB 3 NE	10-20 years	C1	Major branch dieback, Major deadwood >100mm, Branch decay, Poor form, Oyster fungus sighted at 7m on primary branch, Branch cavities - recommend reducing back to sound wood
T3	Bay	8	70	1	0.84	3	3	3	3	Mature	0	10-20 years	C1	Multi-stemmed
T4	Apple	5.5	60	1	0.72	1	1	1	1	Semi-mature	1.6 over site	10-20 years	C1	Off site tree - full inspection not possible
G5	Mixed	Up to 4.5	230	1	2.76	2	2	2	2	Early-mature, Mature	0.5	10-20 years	C2	A group comprising apple and pear. Recommend: section to be removed.
T6	Atlantic cedar	11	320	1	3.84	4	4	4	4	Early-mature	0	20-40 years	B1	An early mature tree growing in a prominent position on the front lawn
T7	Apple	4	240	1	2.88	2	2	2	2	Mature	2	10-20 years	C1	Recommend: to be removed.
T8	Whitebeam	6	270	1	3.24	3	2	2	2	Early-mature	1.6 over drive	10-20 years	C1	Recommend: to be removed.
G9	Olive	Up to 2.5	340	1	4.08	0.5	0.5	0.5	0.5	Over-mature	0.5	10-20 years	C2	Major stem decay, Previously crown reduced

KEY :

Tree No: (T= individual tree, G= group of trees, W= woodland)
Age class: Young (Y), Middle aged (MA), Mature (M), Over mature (OM),
Veteran (V) Height (Ht): Measured in metres +/- 1m

Appendix C
TREE FENCING DETAIL

Figure 3 Examples of above-ground stabilizing systems

