



ALLARBORICULTURE

23 Southernhay Avenue, Bristol, BS8 4TJ

07375110399 | 0800 107 3652

e – info@allarboriculture.co.uk

ARBORICULTURAL IMPACT ASSESSMENT AND METHOD STATEMENT

BS5837:2012

On behalf of:
Jean Pierre Kloppers

Site address:
High Chimneys
North Hurst
RG10 0TH

Prepared by:
Kristian Chesterman
BSc (Hons)

Report reference:
AAAIAHIGH

Report date:
14th January 2025

Contents

Chapters	Content	Page no.
1.0	Instruction	3
2.0	Statement Of Purpose	3
3.0	Associated Documents	3
4.0	Site Description	3
5.0	Vegetation Description	3
6.0	Arboricultural Impact Assessment	4
7.0	Method Statement	5
Appendix 1	Tree Survey Schedule	
Appendix 2	Protection	
Appendix 3	Tree Protection Plan	

1.0 Instruction

All Arboriculture has been instructed by Jean Pierre Kloppers to undertake a tree survey in accordance with BS5837:2012 *Trees In relation to design, demolition and construction – Recommendations*, and to produce an Arboricultural Impact Assessment, Arboricultural Method Statement and Tree Protection Plan. The instruction was received on the 7th January 2025. The tree survey was carried out on the 8th January 2025.

2.0 Statement of purpose

The purpose of this report is to provide local planning authorities with sufficient arboricultural information to consider the effect of the proposed development on nearby trees, and to demonstrate that trees have been carefully considered throughout the development process.

The report includes an arboricultural method statement that describes how work will be undertaken to provide adequate protection of retained trees.

3.0 Associated documents and drawings

This report should be read in conjunction with the following documents and drawings:

1. 427-11
2. British Standards Institute - BS5837:2012 *Trees in relation to design, demolition and construction – Recommendations*
3. Tree Protection Plan – AATPPHIGH

4.0 Site description

The site is in the urban area of North Hurst and is a large detached house that has now been divided into two properties with extensive gardens. The proposal is an extension to the garage to provide a summer room with bedroom above following the rebuild of the garage following a previous fire. The site falls under the jurisdiction of Wokingham Borough Council and after searching on the interactive map it was unclear if trees are protected by conservation area or Tree Preservation Order.

5.0 Vegetation description

The vegetation consists of 2 Category B trees and 3 Category C groups. Some tree protection measures and working methodology (in accordance with BS 5837:2012) will ensure they are not detrimentally affected during construction.

6.0 Arboricultural impact assessment

Table 1: Summary of impacts

Tree removal	None
Facilitation pruning	G2
Demolition within RPA	None
New surfacing within RPA	None
New structures within RPA	None

Building construction in relation to tree roots: No tree removal is required for the implementation of the proposed development.

The proposed footprint for the extension to the garage is outside of the RPA of retained trees and groups so traditional foundations may be used and will have no impact and the Category C groups.

Building construction in relation to tree crowns: The minor facilitation pruning of G2 is required. It is important that sufficient growing space is allowed between the mature crown extent of each tree and the roof edge of the proposed structures. This is to reduce conflicts of interest in the future and to reduce the pressure to prune trees to keep them clear of roofs: A clearance of two metres from the mature tree crown is generally considered acceptable which is the case with this proposal.

Tree root and canopy protection: The RPA (Root protection area) of the retained trees should be protected during the development phase with heras fencing and/or ground protection to ensure heavy machinery is not operated, or materials stored within the rooting area. This can be detrimental to the trees, causing soil compaction and root die back. The protection of the RPA and canopy spread is detailed in the Arboricultural Method Statement below.

Materials delivery, storage and handling: Materials should not be handled or stored within the RPA's of retained trees; the load exerted can result in soil compaction and leachate from spills can be toxic to trees.

Surface drains, soakaways and services: It is important that services, surface drains and soak aways avoid the RPA's of retained trees as roots can be damaged during trench excavations.

7.0 Arboricultural method statement

Implementation and phasing of the proposed development: Prior to any building work commencing on site, a meeting will be held with the tree consultant and site manager present. During the meeting details regarding the location of tree protection will be discussed and a time to reconvene in order to assess the heras fencing and ground protection will be agreed.

Protective measures must be in place prior to any ground or construction works take place.

Tree protection barriers: Protective fencing will be installed prior to the commencement of any construction development activity and will be retained in the positions shown on the tree protection plan (AATPPHIGH). The fencing will be to the BS 5837:2012 'Trees in relation to design, demolition and construction – recommendations' (section 6.2) i.e. preformed galvanised steel mesh panels ('Heras' or similar) facings on a driven braced scaffold pole framework. It will be retained at the locations shown until construction is completed. It may be moved or removed only with notice to and consent from the local planning authority.

Ground protection: Temporary ground protection to be installed within RPA of G2 should be capable of supporting pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane.

Special surfacing: I do not consider special surfacing to be warranted.

Storage and handling of materials: This site has sufficient space for materials to be stored and handled and must be outside of the RPA's of retained trees.

Contractors parking: There is sufficient space on site for parking.

Welfare facilities: Toilets and hand washing facilities shall be made available within the property and there is sufficient space for temporary facilities.

Surface drains, soakaways and services: No details of new service runs have been provided at this stage. However, it is likely the existing services will be utilised for the proposed development. They should be routed to avoid the RPA's of retained trees. If this is not possible, special techniques must be employed to place the services within the RPA of the trees. The British Standard suggests a range of trench less methods suitable for various applications including micro tunnelling, surface launched directional drilling, Pipe ramming and Impact Moleing/thrust boring.

It is important common ducts should be used where it is not possible to avoid the RPA. Further guidance on installing underground services adjacent to trees can be found in the NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees (Volume 4 Issue 2). This document outlines a number of techniques that may be used for trenching near trees, including trench less techniques, discontinuous trenching and hand digging.

Supervision: The project arboriculturalist will attend the site to inspect the tree protection and ensure that it has been laid out as prescribed in the method statement and meets the requirements of BS5837:12. It is the responsibility of the site manager to inform the arboricultural consultant when inspections are required.

Tree works: Facilitation pruning of G2 will be required. G2 will be crown lifted to 5m by tip reducing low, hanging branches. The health and appearance of the trees will not be affected. All tree work shall be carried out in accordance with BS 3998:2010 Tree Work – Recommendations by suitably qualified personnel.

Sequencing of works

1. Installation of Tree Protection as shown on the TPP.
2. Arboricultural Consultant to check Tree Protection at this stage.
3. Main construction phase
4. Remove tree protection when all construction activity has ended.
5. Carry out landscaping works (**if required**).
6. Completion

Contacts

Architect and Agent:

Name:

Tel:

E:

Arboricultural Consultant:

Name: K Chesterman

Tel: 07375110399

E: info@allarboriculture.co.uk

APPENDIX 1 - Tree Schedule Schedule

Tree No	Species	Height (m)	Trunk Diameter (cm)	Crown spread (m)		Crown height above ground (m)	Life stage	General observations	BS 5837 cat	Root protection area (m)
G1	2 x Lawsons Cypress	5	15	1	1	<1	Early Mature	Suppressed.	C	1.8
				1	1					
G2	Laurel / Holly	9	40	3	5	<1	Early Mature	No significant defects.	C	4.8
				5	3					
G3	Laurel, Cherry, Sweet Chestnut	14	40	3	3	4	Early Mature	Mixed group.	B	4.8
				3	3					
4	Western Redcedar <i>Thuja plicata</i>	15	56	3	3	2	Early Mature	Lean to the West.	B	6.7
				3	3					
5	Oak <i>Quercus robur</i>	15	58	6	5	4	Early Mature	Lean to the East. Deadwood present.	B	6.9
				5	5					

APPENDIX 1 - Tree Schedule Schedule

Survey Key

Diameter (mm)

Stem diameter in millimetres measured at 1.5m above ground level. Where the stem is divided below 1.5m, measurement is taken as directed by BS:5837 Annex

C. RPA - Root Protection Area

RPA circle radius is determined from Annex D of BS:5837. R- Radius

A – Area

Branch Spread (m)

Radial crown spread in metres, measured for each of the four cardinal points of the compass from the centre of the trunk. Low branches

N E
W S

Height above ground in metres of the lowest branch and use of the 4 cardinal points of the compass.

Age class

(NP) Newly planted – a tree within 3 years after planting

(Y) Young – a tree within its first one third of life expectancy

(EM) Early Mature – a tree within its second third of life expectancy

(M) Mature – a tree in its final one third of life expectancy

(OM) Over Mature – a tree having reached its maximum life span and is declining in health and size due to old age

(V) Veteran – a tree in the second or mature stage of its life and has important wildlife and habitat features including; hollowing or associated decay fungi, holes, wounds and large dead branches.

(A) Ancient – a tree in the ancient or third and final stage of their life that is of interest biologically, aesthetically or culturally because of its age, size and condition

Physiological Condition

GOOD – a tree in a healthy condition with no significant problems

FAIR – a tree generally in good health with some problems that can be remediated POOR – a tree in poor health with significant problems that can't be remediated DEAD – a tree without sufficient live material to sustain life

Structural Condition

An assessment of the structural/safe condition of the tree categorised into:

GOOD – a tree in a safe condition with no significant defects

FAIR – a tree in a safe condition at present but with defects or with significant defects that can be remediated POOR – a tree with significant defects that can't be remediated.

EC - Estimated remaining contribution in years (based on the species and its current condition)

<10 Up to 10 years

10+ 10 years or more

20+ 20 years or more

40+ 40 years or more

Category (Tree quality assessment)

Category U – Tree in poor condition that cannot realistically be

retained for longer than 10 years Category A – Trees of high quality

Category B – Trees of moderate quality Category


C – Trees of low quality

APPENDIX 2 – Protective Fencing


Protective fencing should be erected before any construction commences on site. It should also be in position to protect important trees prior to demolition.

Protective fencing should stay in position until all construction activity has finished.

‘Fencing should be established at the minimum distance set out in British Standard 5837:2012 *‘Trees in relation to design, demolition and construction - Recommendations’*. Excavations should not encroach into the fence position and it is appropriate to keep at least 0.5m between the fence and any changes in level.

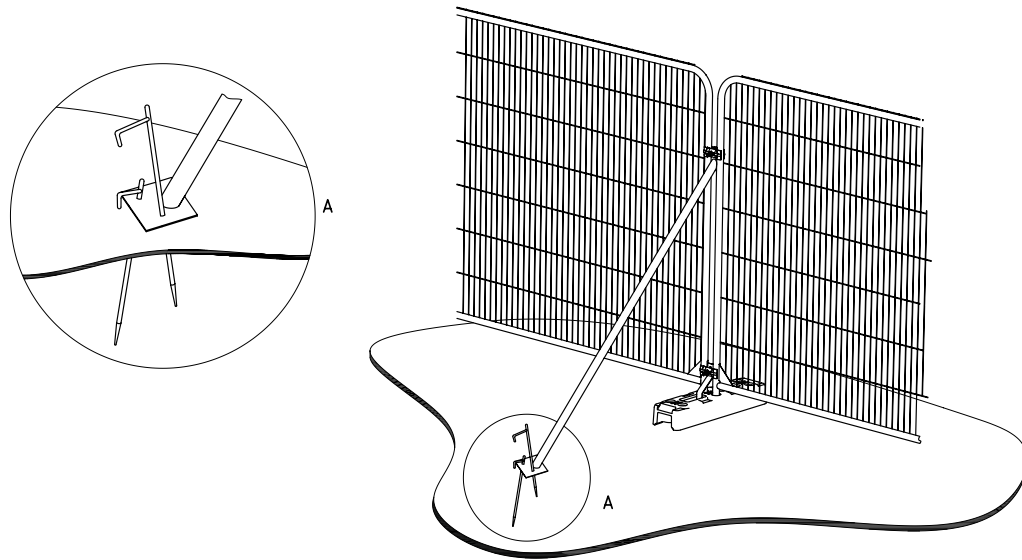

a) Stabilizer strut with base plate secured with ground pins

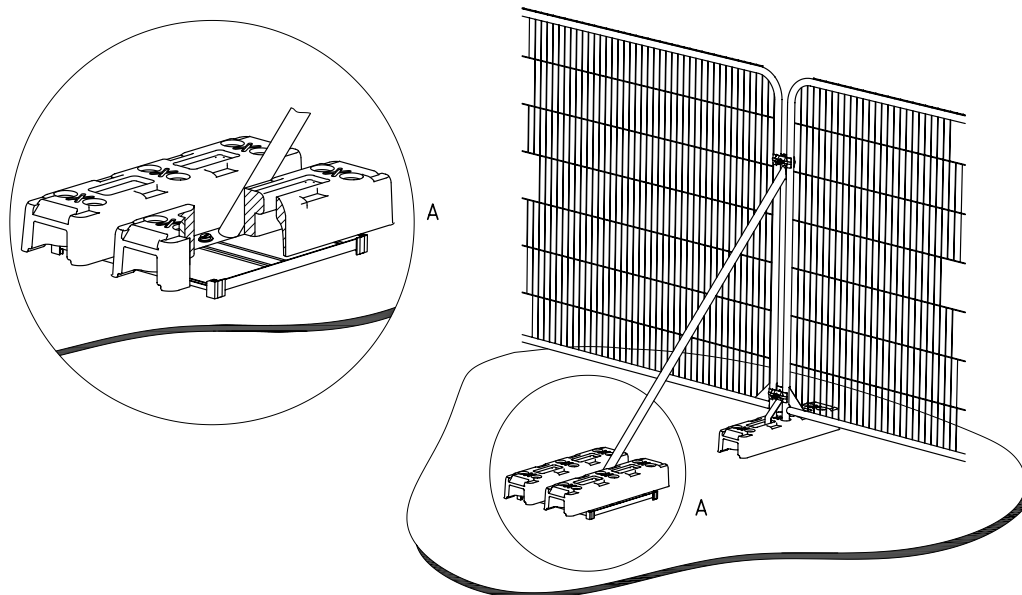



b) Stabilizer strut mounted on block tray

APPENDIX 2 – Ground Protection

Where ground protection measures are necessary, they can be provided by laying a geotextile mat onto the existing ground level and adding to this compressible materials, such as bark mulch or sharp sand to form a safe, level surface. Onto this surface is laid scaffold boards which become the working surface for the duration of the construction phase.

Where scaffolding is proposed above the area requiring protection the footway can be suspended above ground level using the upright scaffold poles onto which horizontal supports can be attached and then boards used to form the footway surface. A geotextile mat should be laid on the ground beneath to prevent contamination from materials dropped through the footway.

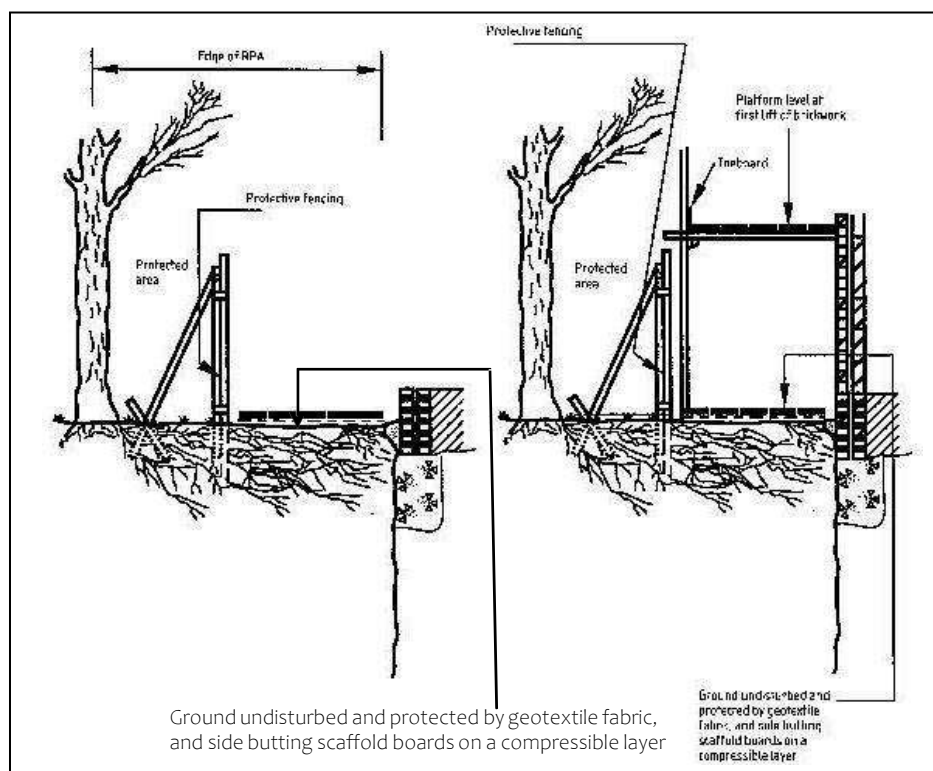

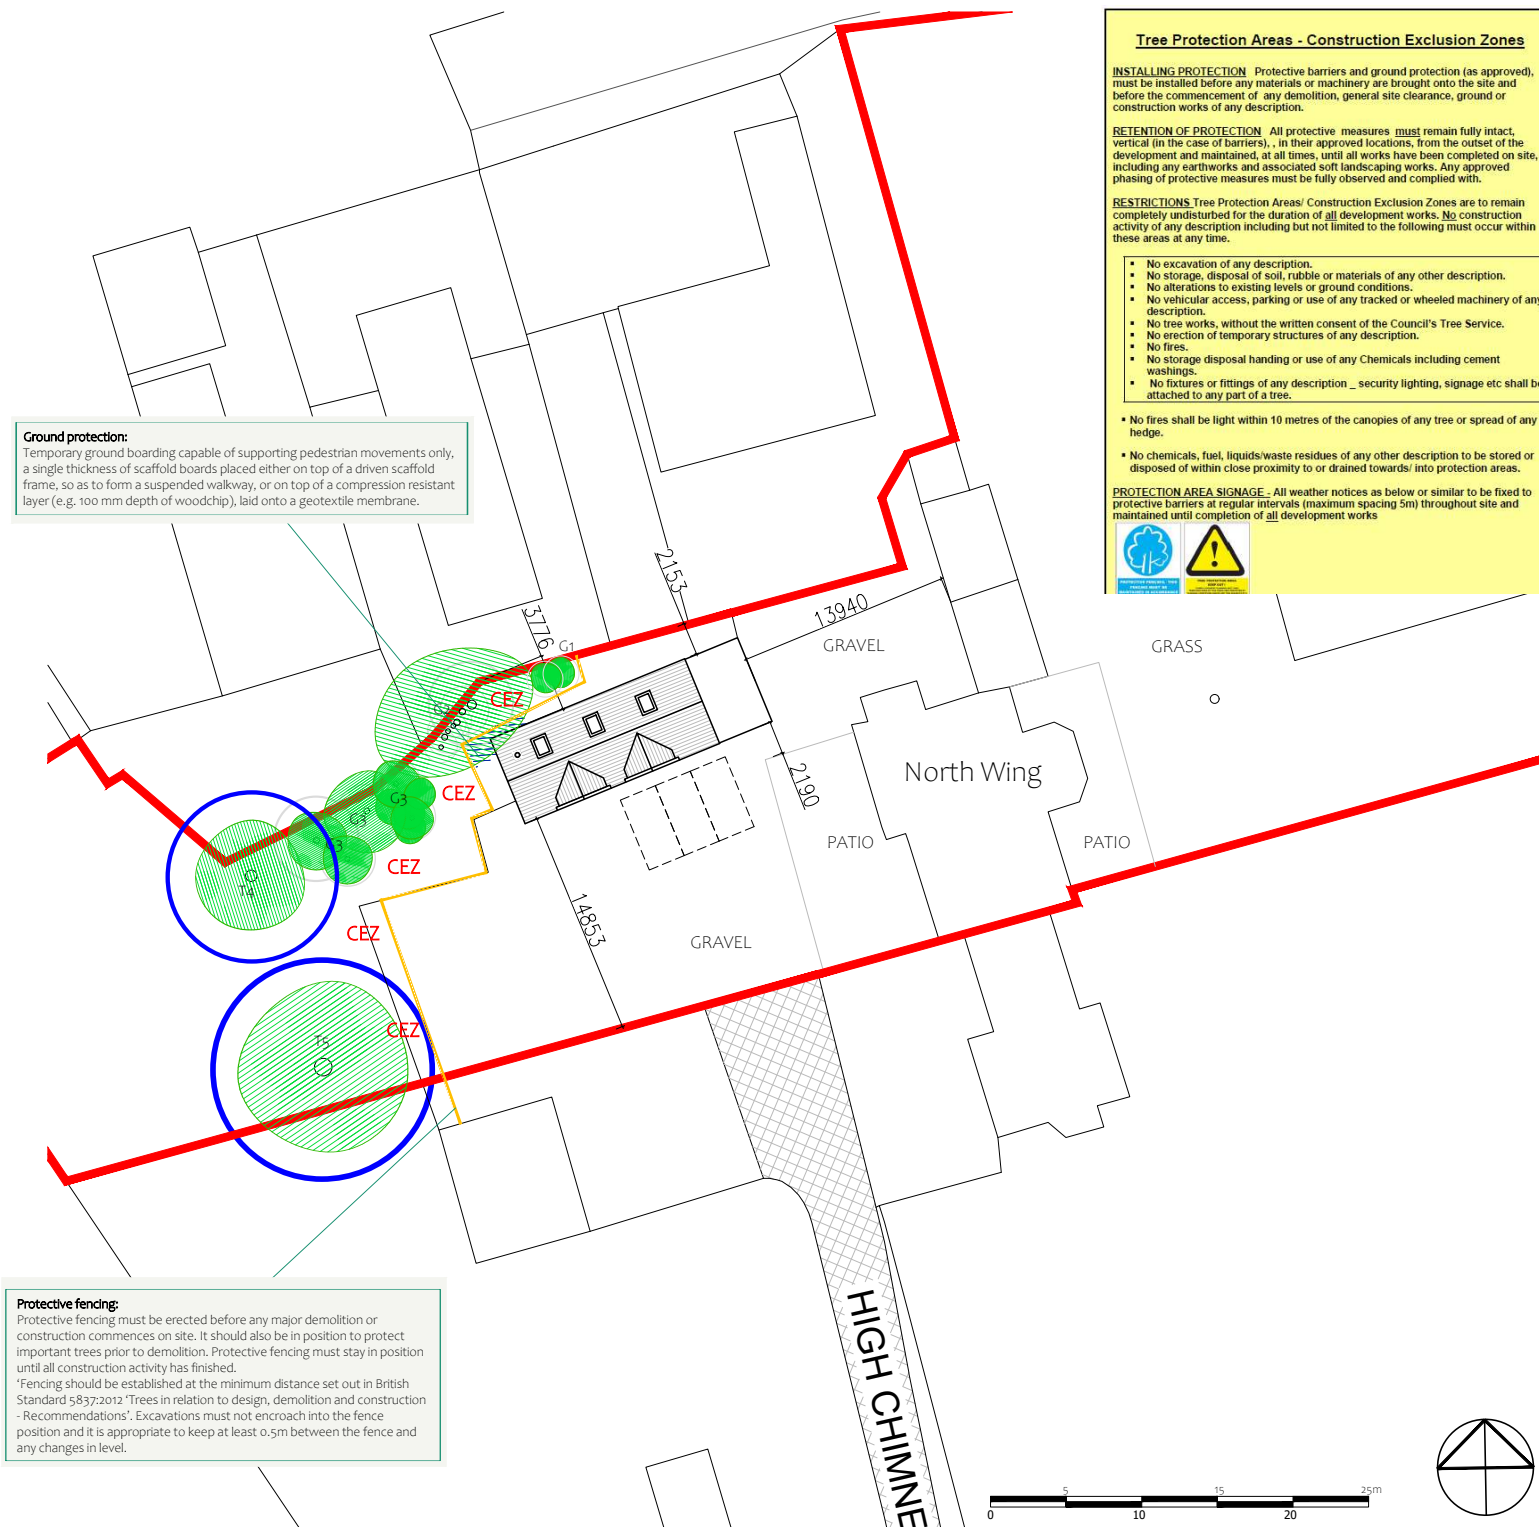

Ground protection:
Temporary ground boarding capable of supporting pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane.

Protective fencing:
Protective fencing must be erected before any major demolition or construction commences on site. It should also be in position to protect important trees prior to demolition. Protective fencing must stay in position until all construction activity has finished.
*Fencing should be established at the minimum distance set out in British Standard 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'. Excavations must not encroach into the fence position and it is appropriate to keep at least 0.5m between the fence and any changes in level.

Tree Protection Areas - Construction Exclusion Zones

INSTALLING PROTECTION Protective barriers and ground protection (as approved), must be installed before any materials or machinery are brought onto the site and before the commencement of any demolition, general site clearance, ground or construction works of any description.

RETENTION OF PROTECTION All protective measures must remain fully intact, vertical (in the case of barriers), in their approved locations, from the outset of the development and maintained, at all times, until all works have been completed on site, including any earthworks and associated soft landscaping works. Any approved phasing of protective measures must be fully observed and complied with.

RESTRICTIONS Tree Protection Areas/ Construction Exclusion Zones are to remain completely undisturbed for the duration of all development works. No construction activity of any description including but not limited to the following must occur within these areas at any time.

- No excavation of any description.
- No storage, disposal of soil, rubble or materials of any other description.
- No alterations to existing levels or ground conditions.
- No vehicular access, parking or use of any tracked or wheeled machinery of any description.
- No tree works, without the written consent of the Council's Tree Service.
- No erection of temporary structures of any description.
- No fires.
- No storage disposal handling or use of any Chemicals including cement washings.
- No fixtures or fittings of any description - security lighting, signage etc shall be attached to any part of a tree.

No fires shall be light within 10 metres of the canopies of any tree or spread of any hedge.

No chemicals, fuel, liquids/waste residues of any other description to be stored or disposed of within close proximity to or drained towards/ into protection areas.

PROTECTION AREA SIGNAGE - All weather notices as below or similar to be fixed to protective barriers at regular intervals (maximum spacing 5m) throughout site and maintained until completion of all development works



RPA for Cat A* tree

RPA for Cat B* tree

RPA for Cat C* tree

RPA for Cat U* tree

Tree canopy

Heras fencing

Ground protection

CEZ Construction Exclusion Zone

All Arboriculture
23 Southernhay Avenue
Bristol
BS8 4TJ



Client: Jean Pierre Kloppers

Consultant: Kristian Chesterman

Site: High Chimneys, North Hurst,
RG10 0TH

Title: Tree Protection Plan

Scale at A4
1:500

Date:
14/01/2025

Document Ref.
AATPPHIGH