

Materials Schedule

Plot 2
Scott's Yard
59 Nine Mile Ride
Finchampstead
Planning reference number: 223084

West Elevation



East Elevation



Roof Covering - slate



Front Door - Aluminium

Colour dark grey

Thermally efficient 66mm, triple glazed laminated glass with centre pane U values from 0.9W/m²K


Fully tested to PAS 24:2016



Cladding – Cedar (library picture)



Wienerberger Terca Class B Engineering Brick Red 215mm x 102.5mm x 65mm (Pack of 504/400)

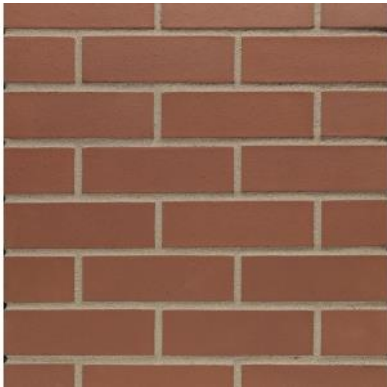

Technical specification

Brand Name	Wienerberger	Manufacturer Model No	24190030
Made To Order	N	Height	65 mm
Length	215 mm	Width	102.50 mm
Weight	1.95 kg	Colour	Red
Colour Family	Reds	Durability	F2 Severe Exposure
Compressive Strength	50 N/mm2	Water Absorption Rating	7%
Texture	Smooth	Manufacturing Process	Wirecut
Factory	Sandown	Type	Engineering Brick

Windows & Doors

Double glazed, aluminium premium plus in grey.

Tech Info:

System U-value from 1.1W/m2K

Air Permeability: Class 4

Watertightness: E2250

Resistance to wind classification: C5

PAS 24 Security certified

Max sash width: 1800mm (top hung)

Max sash height: 1600mm (top hung)

Max sash width; 800mm (side hung)

Max sash height: 1600mm (side hung)



Triple glazed, aluminium, Bi-fold doors, premium plus in grey.

Tech Info:

System U-value from 1.2W/m²K

Watertightness: E750 (750 Pascals)

Resistance to windload: A4 (1800 Pascals)

Max sash width: 700mm

Max sash height: 1600mm (top hung)

Max sash width: 1000mm

Max sash height: 2500mm



Black Painted Fascia and guttering

