

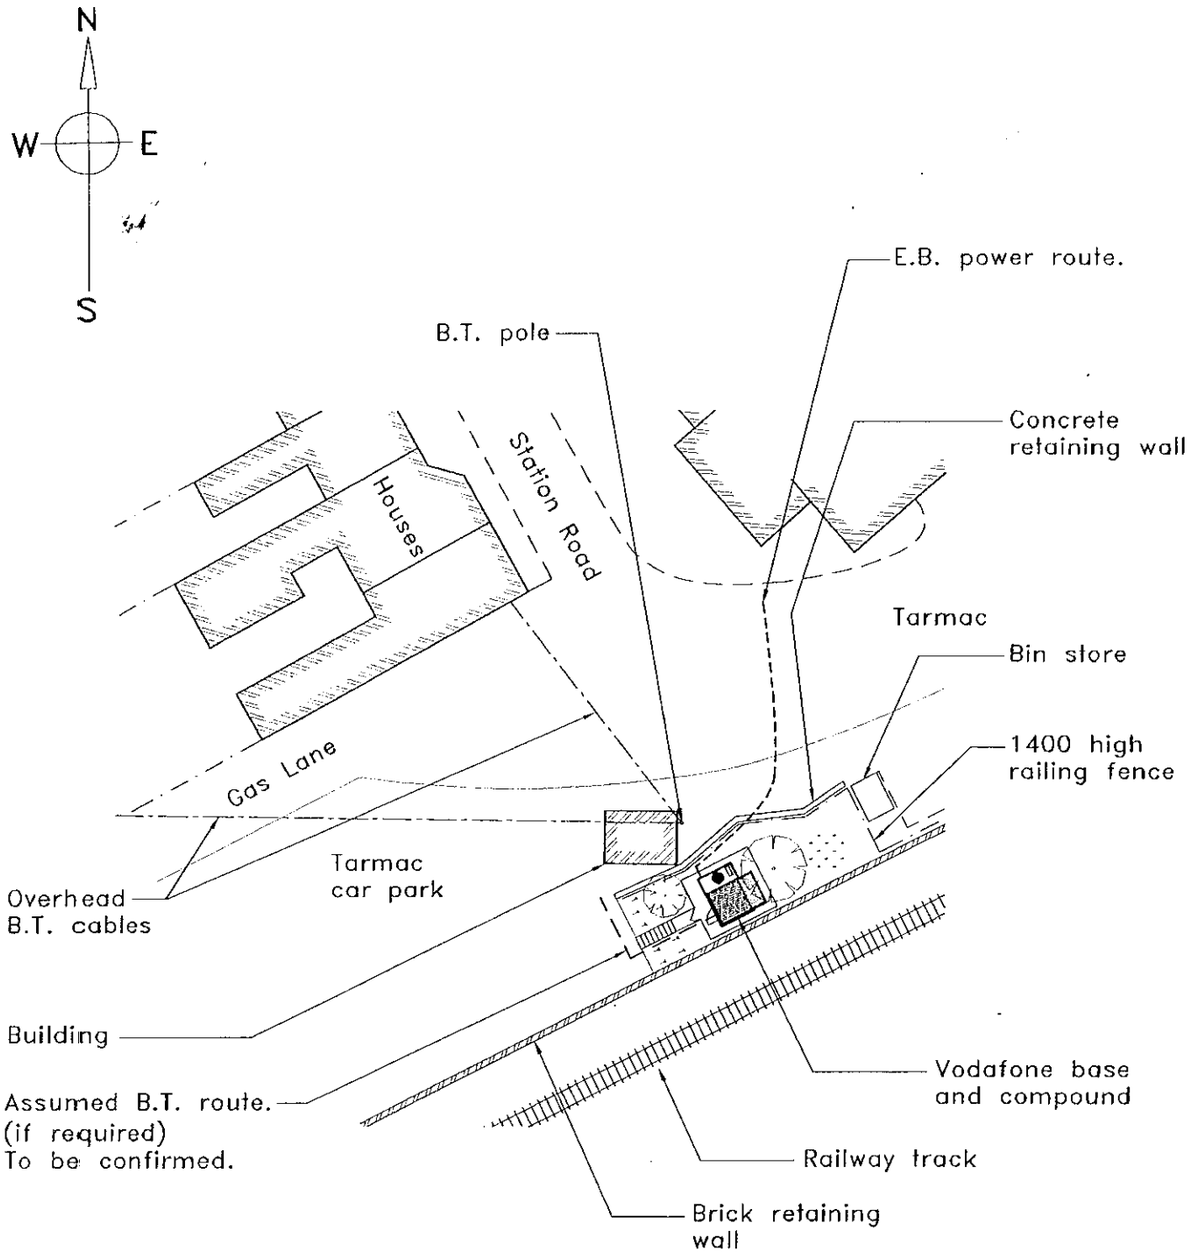


SITE PLAN.
1:500

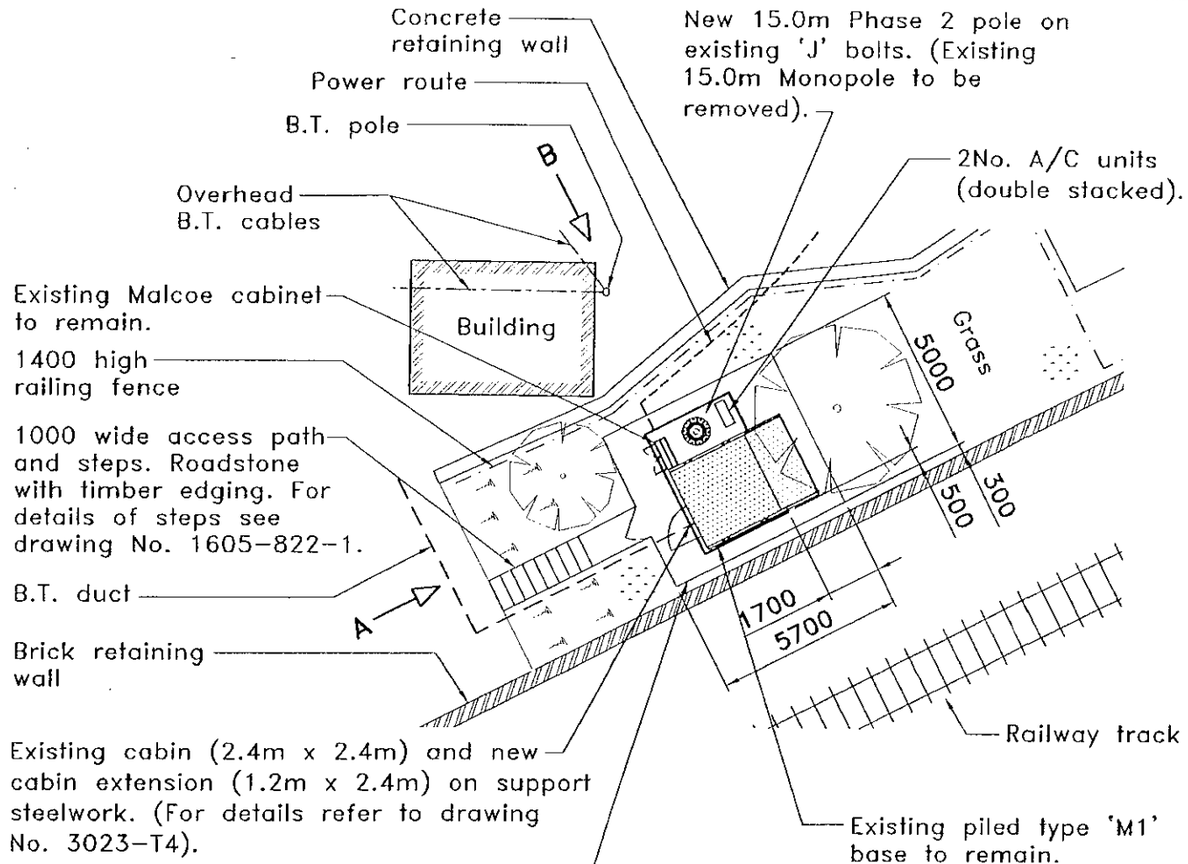

BASE LOCATION PLAN.
1:200

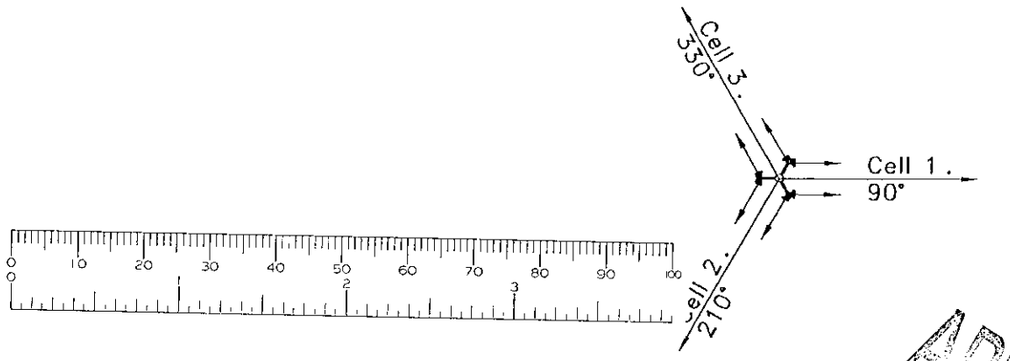

ANTENNA ORIENTATION PLAN.

APPROVED

71832

2000/2447


Ballast Wiltshier FS22848

vodafone FS12463


REV	BY / CHK	APP'D	DESCRIPTION		DATE
-	MJW/NK	JC/BQP	Contract issue		22/04/98
A	MJW/JC	JC/BQP	Power route revised and confirmed.	(3637)	29/05/98
B	HB/JC	JC/BQP	Base type amended and A/C unit removed.	(4709)	01/04/99
C	RWC/JB	JB/BW	Cabin and pole arrangement amended.		06/09/00
D	LIC/JB	JB/BW	Phase 2 pole indicated.		29/09/00

TWYFORD - BRITISH RAIL STATION - STATION ROAD
SITE PLANS

SCALES	Drawing Status	DWG No.	Rev
1:500 1:200	Proposal	3023-T1	D

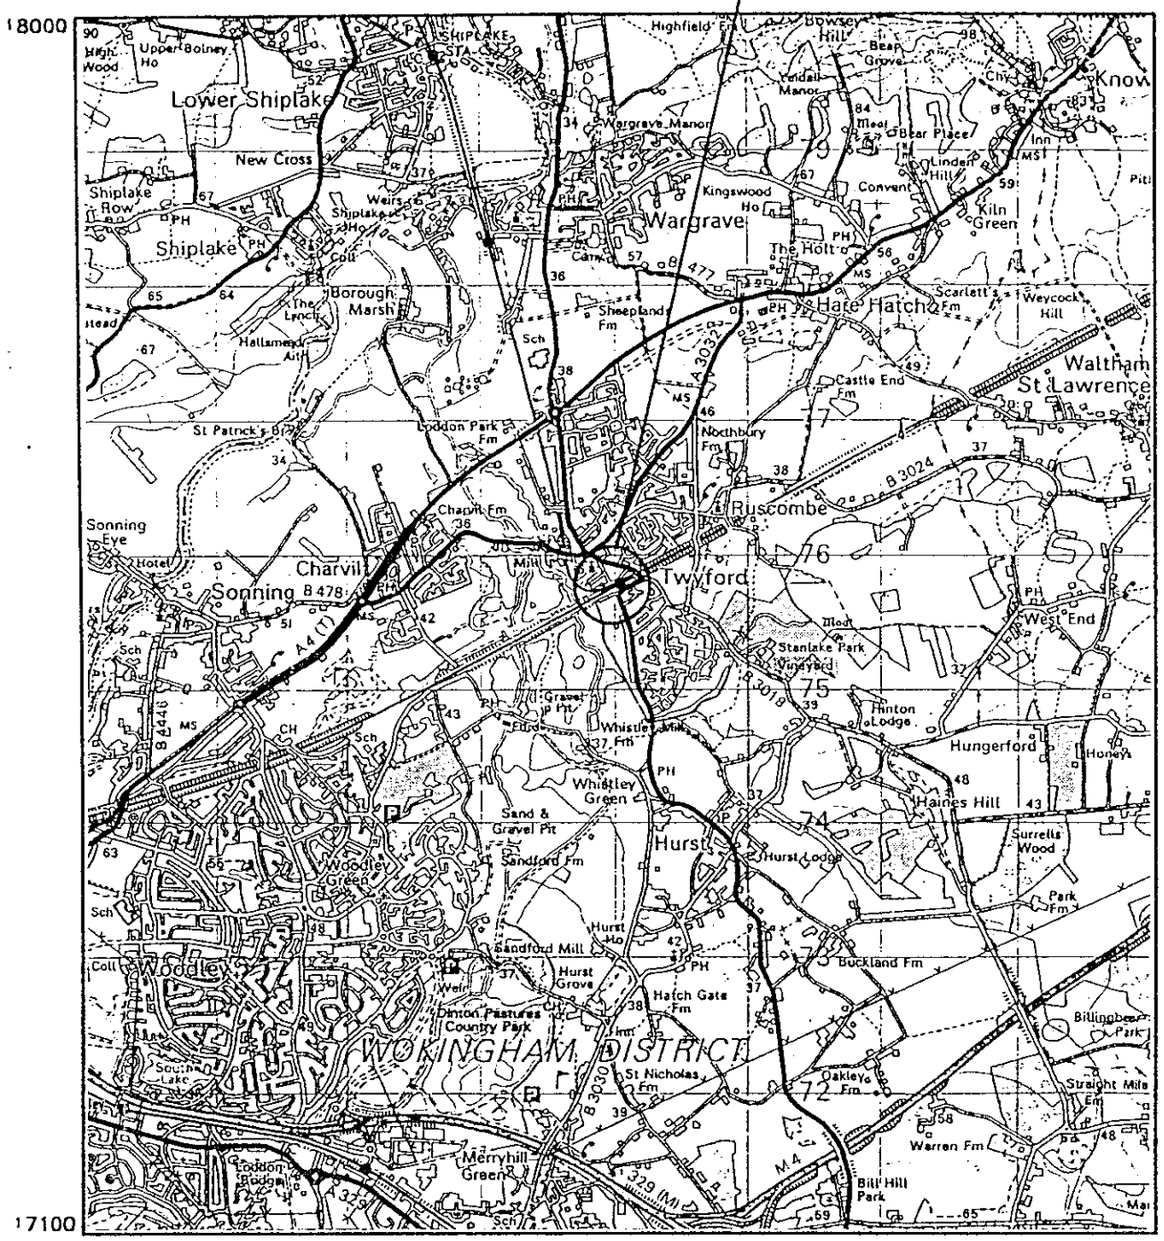

Site Grid Reference SU 7897 7576
Landranger 1:50,000. Map number 175

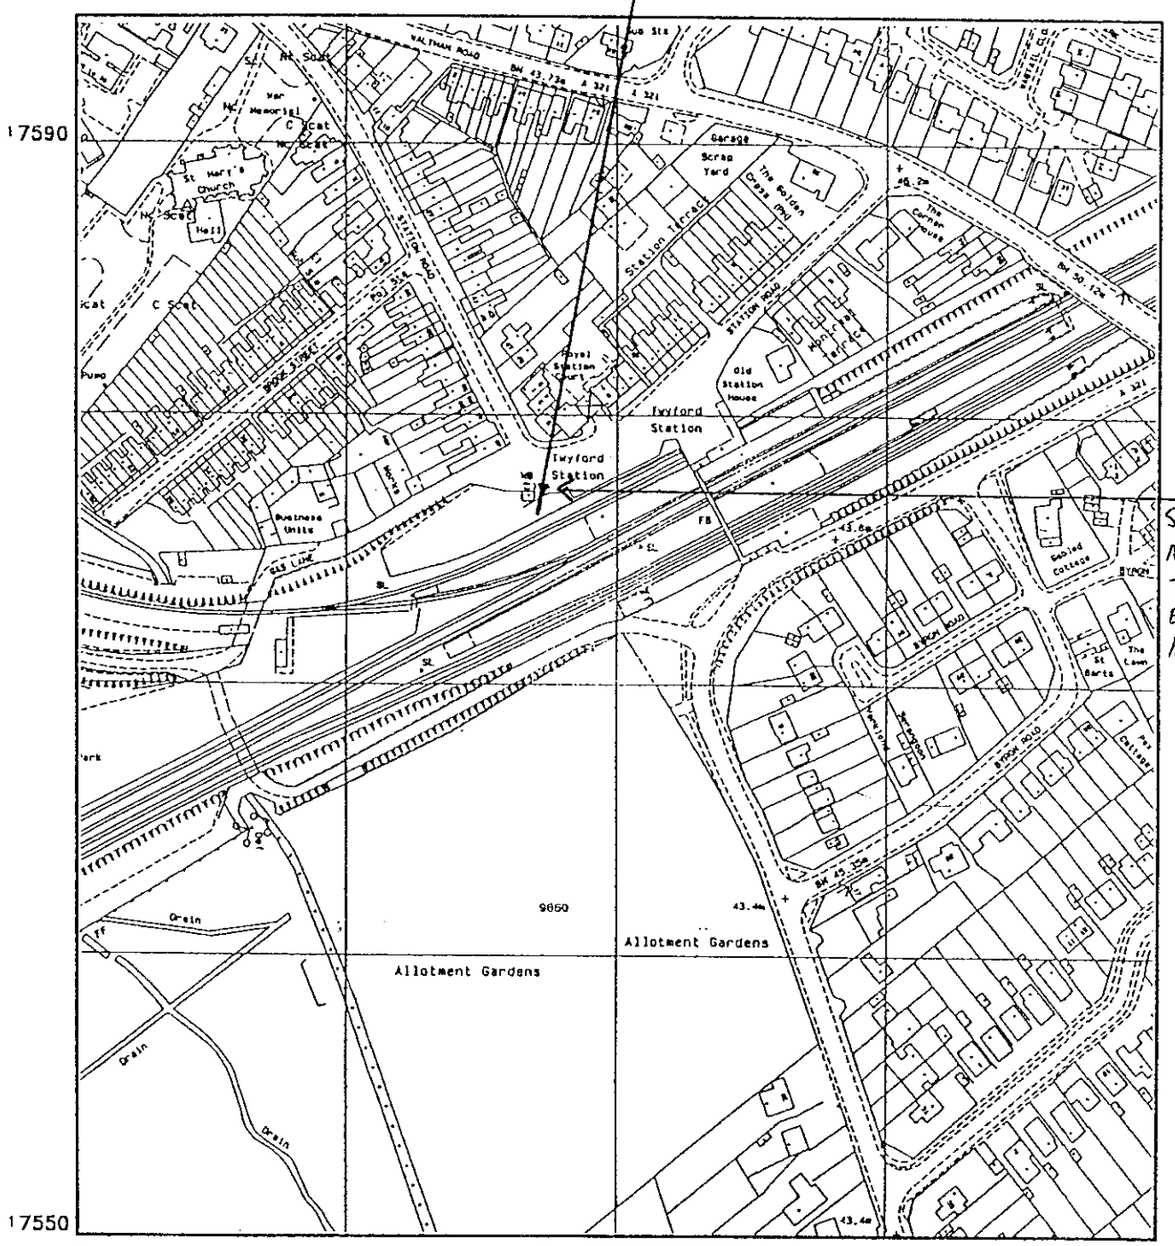

Site Grid Reference SU 7897 7576
(Scale 1:2,500)

APPROVED

2000/2443

Reproduced from the Ordnance Survey maps with permission of the Controller of H.M. Stationery office. © Crown Copyright.

71832


Ballast Wiltshier FS22848

vodafone FS12483

REV	BY/CHK	APP'D	DESCRIPTION	DATE
-	MJW/NK	JC/EQP	Contract issue	22/04/98

TWYFORD – BRITISH RAIL STATION – STATION ROAD
SITE LOCATION MAPS

SCALES	Drawing Status	DWG No.	Rev
AS SHOWN	Construction	3023-M1	-

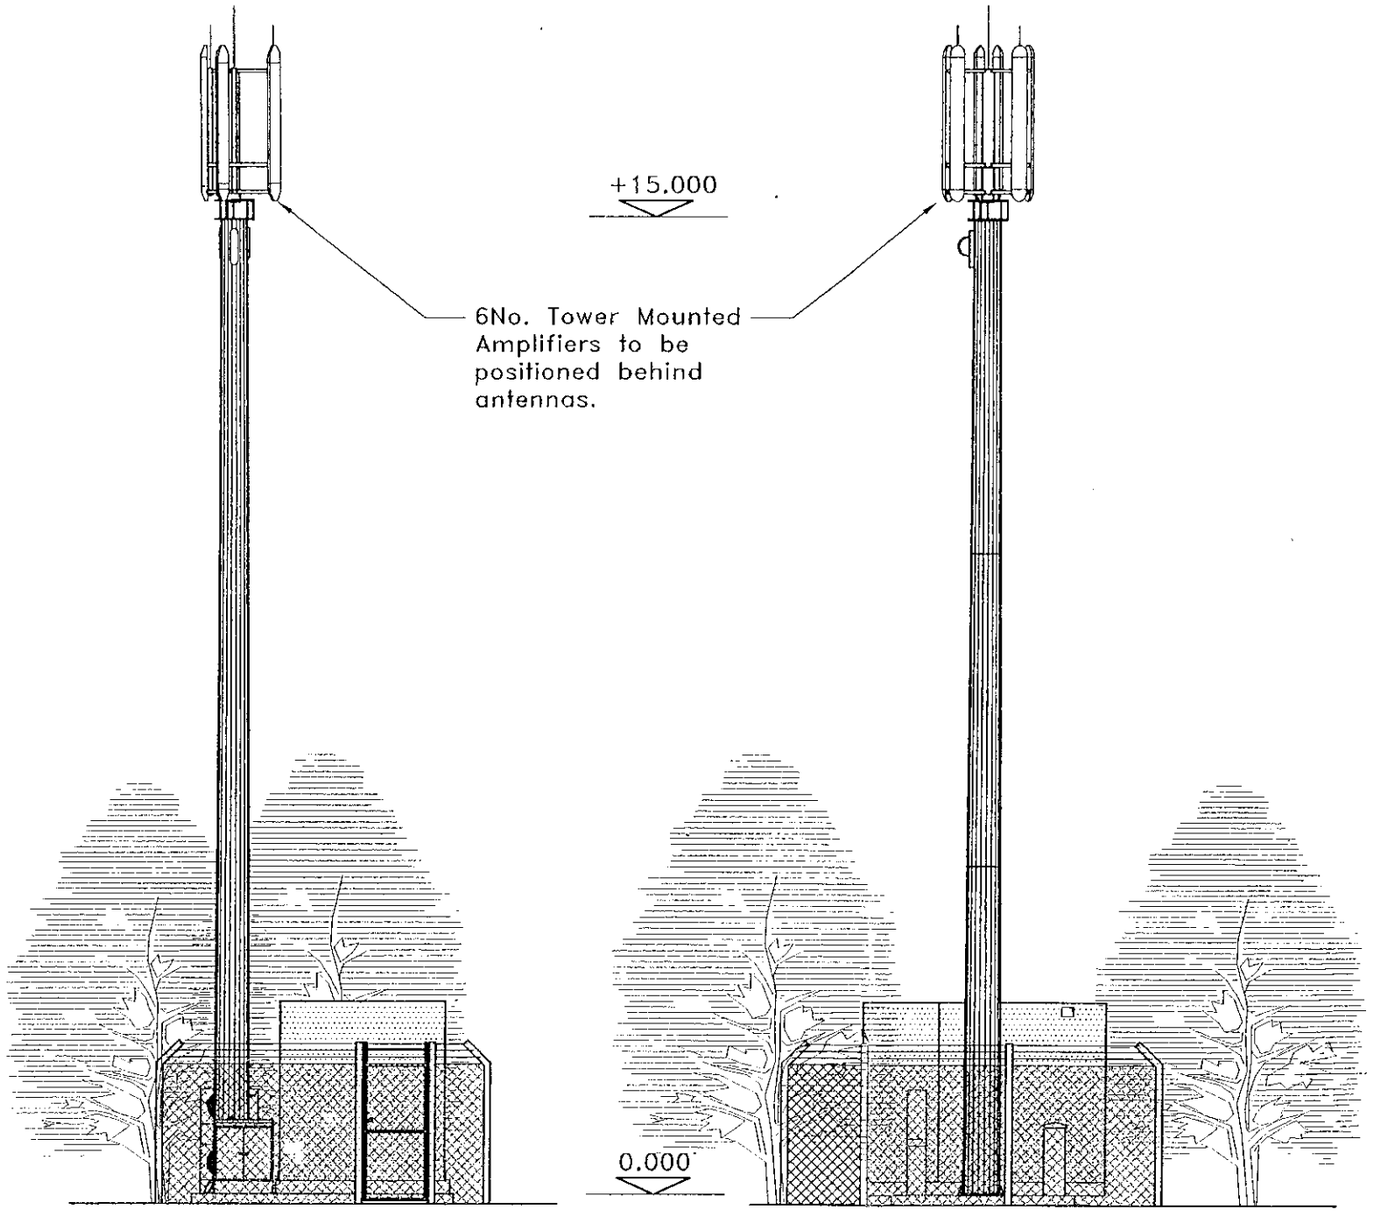

VIEW A

VIEW B

NOTES.

Piled type 'M1' base with :-
New 15.0m Phase 2 pole - existing monopole to be removed.
6No. XPD 72-10 X-polar antennas.
Orientations - Cell 1 = 90° (0°- 6° downtilt)
Cell 2 = 210° (0°- 6° downtilt)
Cell 3 = 330° (0°- 6° downtilt)
Existing cabin (2.4m x 2.4m) with new cabin extension (1.2m x 2.4m) on support steelwork.
Malcoe cabinet to remain.
1No. A/C unit replaced with 2No. (double stacked) A/C units.

300mm dia microwave dish - orientation to be confirmed.

2000/21113

APPROVED

71832

Ballast Wiltshier FS22848

vodafone FS12463

REV	BY / CHK	APPD	DESCRIPTION		DATE
-	MJW/NK	JC/BQP	Contract issue		22/04/98
A	HB/JB	JB/BQP	Base type amended and A/C unit removed.	(4709)	01/04/99
B	RWG/JB	JB/BW	Cabin and pole arrangements amended.		08/09/00
C	LIC/JB	JB/BW	Phase 2 pole indicated.		29/09/00

TWYFORD - BRITISH RAIL STATION - STATION ROAD
ELEVATIONS

SCALES	Drawing Status	DWG No.	Rev
1:100	Proposal	3023-T2	C